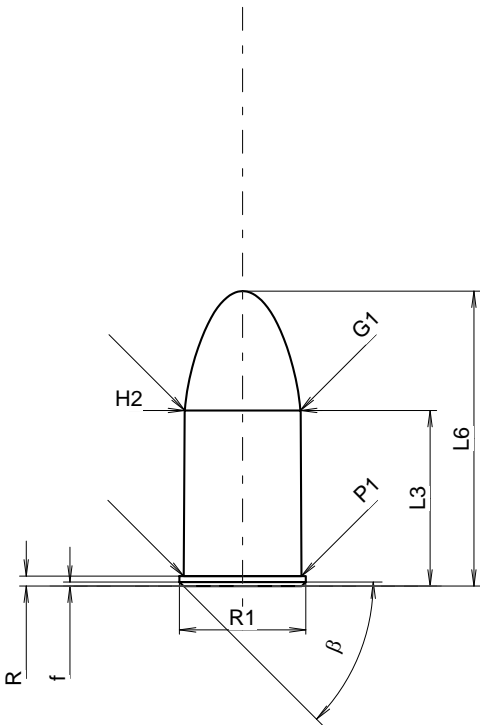
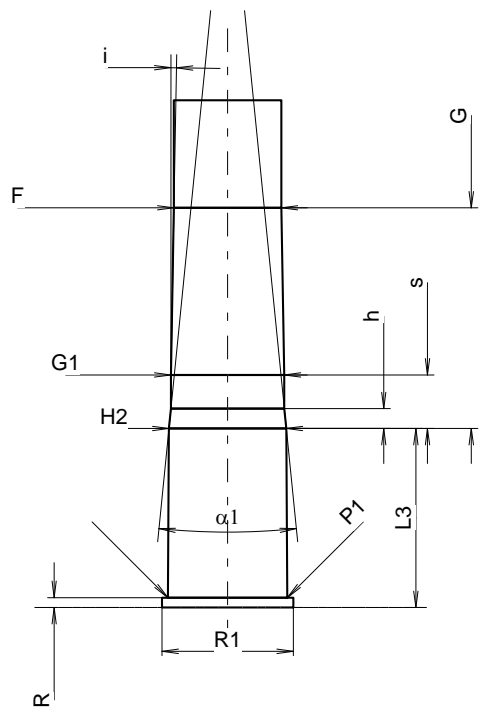


| C.I.P. | 11 mm 73 | TAB. | IV |
|---|---|---|----------|
| | | Date | 02-01-22 |
| | | Revision | 13-05-22 |
| Country of Origin: FR | | | |
|  | CARTRIDGE MAXI | CHAMBER MINI | |
| | Lengths L1 = L2 = L3 ¹⁾ = 17.65 L4 = L5 = L6 = 29.65 Case Head R ¹⁾ = 1.00 -0.25 R1 = 12.70 R3 = E = E1 = e min = δ = f = 0.40 β = 45° Powder Chamber P1 = 11.85 P2 = Junction Cone α = S = r1 min = r2 = Collar H1 = H2 ¹⁾ = 11.65 Projectile G1 ¹⁾ = 11.60 G2 = F = L3+G ¹⁾ = 39.83 Pressures (Energies) Method Transducer Pmax = 1150 bar PK = 1323 bar PE = 1495 bar M = 9.50 Miscellaneous Dimensions Fe ¹⁾⁴⁾ = 0.25 delta L = | Lengths L1 = L2 = L3 ¹⁾ = 18.00 Breech R ¹⁾ = 1.00 R1 = 13.20 R2 = R3 = r = Powder Chamber E = P1 ¹⁾ = 12.00 P2 = Junction Cone α = S = r1 max = r2 = Collar H1 = H2 ¹⁾ = 11.80 Commencement of Rifling G1 ¹⁾ * = 11.40 G ¹⁾ * = 22.18 α1 = 11°25'15" h = 2.00 s* = 5.38 i ¹⁾ = 1°01'23" w = Barrel F ¹⁾ * = 10.80 Z ¹⁾ = 11.20 Grooves b = 4.30 N = 4 u = 350.00 Q = 95.14 mm ² | |
|  | Scale 1.32:1 Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1. | | |
| Notes: | | 1) Check for safety reasons 4) Headspace on Rim * Basic dimensions | |