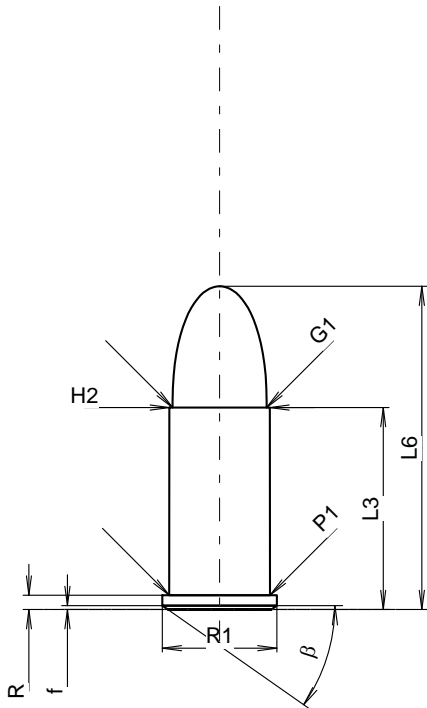
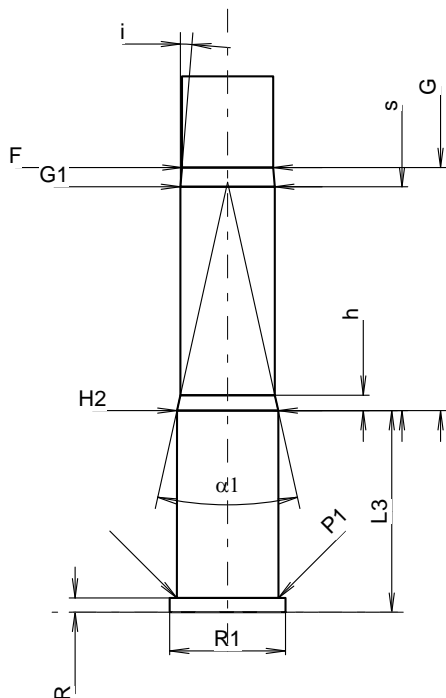


C.I.P.	38 S&W	TAB.	IV
		Date	84-06-14
		Revision	20-04-21
Country of Origin: US			
Alternative Names: 38 Colt New Police; 38 Colt N. P.			
	CARTRIDGE MAXI		CHAMBER MINI
	Lengths L1 = L2 = L3 ¹⁾ = 19.69 L4 = L5 = L6 = 31.50 Case Head R ¹⁾ = 1.40 -0.25 R1 = 11.18 R3 = E = E1 = e min = δ = f = 0.38 β = 35° Powder Chamber P1 = 9.82 P2 = Junction Cone α = S = r1 min = r2 = Collar H1 = H2 ¹⁾ = 9.79 Projectile G1 ¹⁾ = 9.17 G2 = F = L3+G ¹⁾ = 43.37 Pressures (Energies) Method Transducer Pmax = 1200 bar PK = 1380 bar PE = 1560 bar M = 9.00 Miscellaneous Dimensions Fe ¹⁾⁶⁾ = 0.25 delta L =		Lengths L1 = L2 = L3 ¹⁾ = 19.65 Breech R ¹⁾ = 1.40 R1 = 11.28 R2 = R3 = r = Powder Chamber E = P1 ¹⁾ = 9.91 P2 = Junction Cone α = S = r1 max = r2 = Collar H1 = H2 ¹⁾ = 9.86 Commencement of Rifling G1 ¹⁾ * = 9.19 G ¹⁾ = 23.68 αl * = 25° h = 1.49 s = 21.81 i ¹⁾ * = 4°35' w = Barrel F ¹⁾ * = 8.89 Z ¹⁾ = 9.13 Grooves b = 2.90 N = 5 u = 476.00 Q = 63.84 mm ²
	Scale 1.36:1		
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1.		Notes: 1) Check for safety reasons 6) Headspace on Case Mouth * Basic dimensions	