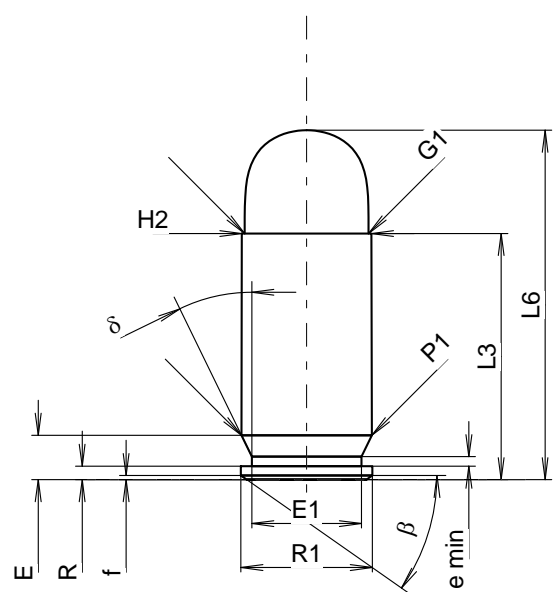
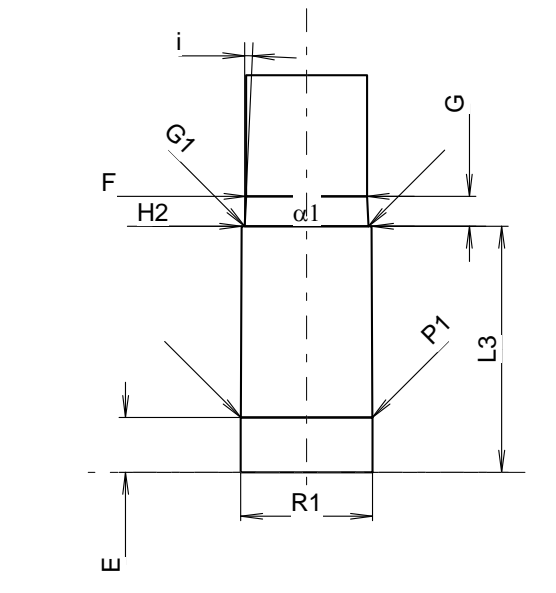


C.I.P.	45 Auto	TAB.	IV
		Date	84-06-14
		Revision	20-04-21
Country of Origin: US			
Alternative Names: 45 ACP			
	CARTRIDGE MAXI		CHAMBER MINI
	Lengths L1 = L2 = L3 ¹⁾ = 22.81 -0.25 L4 = L5 = L6 = 32.39 Case Head R = 1.24 R1 = 12.19 R3 = E = 4.11 E1 = 10.16 e min = 0.89 δ = 26° f = 0.38 β = 35° Powder Chamber P1 = 12.09 P2 = Junction Cone α = S = r1 min = r2 = Collar H1 = H2 ¹⁾ = 12.01 Projectile G1 ¹⁾ = 11.48 G2 = F = L3+G ¹⁾ = 25.58 Pressures (Energies) Method Transducer Pmax = 1300 bar PK = 1495 bar PE = 1690 bar M = 12.50 Miscellaneous Dimensions Fe ¹⁾ = 0.30 delta L =		Lengths L1 = L2 = L3 ¹⁾ = 22.81 Breech R = R1 = 12.22 R2 = R3 = r = Powder Chamber E = 5.08 P1 ¹⁾ = 12.18 P2 = Junction Cone α = S = r1 max = r2 = Collar H1 = H2 ¹⁾ = 12.04 Commencement of Rifling G1 ¹⁾ * = 11.48 G ¹⁾ = 2.77 α l * = 180° h = s = i ¹⁾ * = 2°34'59" w = Barrel F ¹⁾ * = 11.23 Z ¹⁾ = 11.43 Grooves b = 3.73 N = 6 u = 406.00 Q = 101.33 mm ²
			
Scale 1.43:1			
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1.		Notes: 1) Check for safety reasons * Basic dimensions	