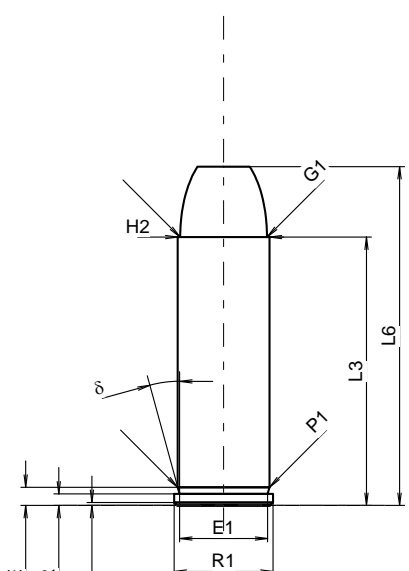
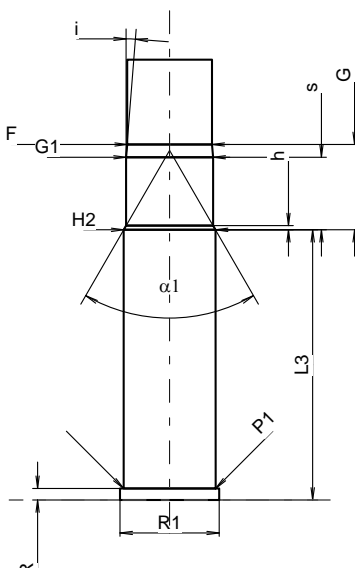


C.I.P.	454 Casull	TAB.	IV
		Date	95-03-09
		Revision	15-05-19
Country of Origin: US			
	CARTRIDGE MAXI Lengths L1 = L2 = L3 ¹⁾ = 35.50 L4 = L5 = L6 = 44.83 Case Head R ¹⁾ = 1.52 -0.25 R1 = 13.10 R3 = E = 2.40 E1 = 11.65 e min = δ = 15°15'18" f = 0.40 β = Powder Chamber P1 = 12.13 P2 = Junction Cone α^* = S * = r1 min = r2 = Collar H1 * = H2 ¹⁾ = 12.12 Projectile G1 ¹⁾ = 11.49 G2 = F = L3+G ¹⁾ = 46.78 Pressures (Energies) Method Transducer Pmax = 3900 bar PK = 4485 bar PE = 5070 bar M = 17.50 Miscellaneous Dimensions Fe ¹⁾⁴⁾ = 0.25 delta L =	CHAMBER MINI Lengths L1 = L2 = L3 ¹⁾ = 35.74 Breech R ¹⁾ = 1.52 R1 = 13.11 R2 = R3 = r = Powder Chamber E = P1 ¹⁾ = 12.18 P2 = Junction Cone $\alpha^{1)*}$ = S * = r1 max = r2 = Collar H1 * = H2 ¹⁾ = 12.13 Commencement of Rifling G1 ^{1)*} = 11.49 G ¹⁾ = 11.28 $\alpha 1$ = 60° h = 0.55 s * = 9.60 i ^{1)*} = 4°25'29" w = Barrel F ^{1)*} = 11.23 Z ¹⁾ = 11.43 Grooves b = 4.06 N = 6 u * = 508.00 Q = 101.54 mm ²	
			
Scale 1:1			
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1.		Notes: 1) Check for safety reasons 4) Headspace on Rim * Basic dimensions	