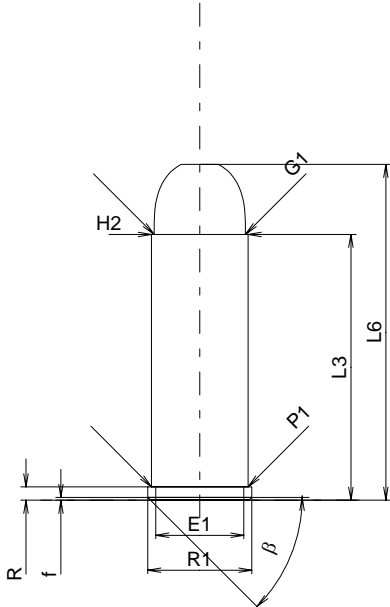
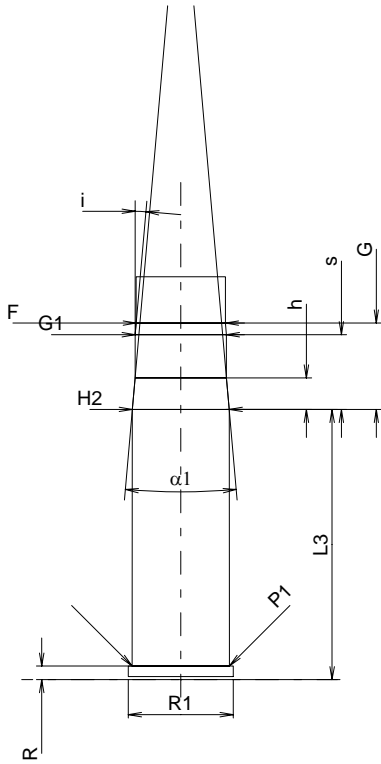


C.I.P.	475 LINEBAUGH	TAB.	IV
		Date	03-02-17
		Revision	04-09-27
Country of Origin: US			
	<b>CARTRIDGE MAXI</b>	<b>CHAMBER MINI</b>	
	<b>Lengths</b> L1 = L2 = L3 <sup>1)</sup> = 35.16 L4 = L5 = L6 = 44.43  <b>Case Head</b> R <sup>1)</sup> = 1.78 -0.25 R1 = 13.77 R3 = E = E1 = 11.65 e min = δ = f = 0.38 β = 45°  <b>Powder Chamber</b>  P1 = 12.80 P2 =  <b>Junction Cone</b> α = S = r1 min = r2 =  <b>Collar</b> H1 = H2 <sup>1)</sup> = 12.80  <b>Projectile</b> G1 <sup>1)</sup> = 12.08 G2 = F = L3+G <sup>1)</sup> = 46.58  <b>Pressures (Energies)</b> <b>Method Transducer</b> Pmax = 3450 bar PK = 3968 bar PE = 4485 bar M = 17.50  <b>Miscellaneous Dimensions</b> Fe = 0.25 delta L =	<b>Lengths</b> L1 = L2 = L3 <sup>1)</sup> = 35.74  <b>Breech</b> R <sup>1)</sup> = 1.80 R1 = 13.87 R2 = R3 = r =  <b>Powder Chamber</b> E = P1 <sup>1)</sup> = 12.86 P2 =  <b>Junction Cone</b> α = S = r1 max = r2 =  <b>Collar</b> H1 = H2 <sup>1)</sup> = 12.81  <b>Commencement of Rifling</b> G1 <sup>1)*</sup> = 12.08 G <sup>1)</sup> = 11.42 α1 <sup>*</sup> = 10° h = 4.17 s = 9.88 i <sup>1)*</sup> = 5° w =  <b>Barrel</b> F <sup>1)*</sup> = 11.81 Z <sup>1)</sup> = 12.07  <b>Grooves</b> b = 4.06 N = 6 u = 457.00 Q = 112.78 mm²	
			
Scale 1:1		Notes: 1) Check for safety reasons * Basic dimensions	
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1.			