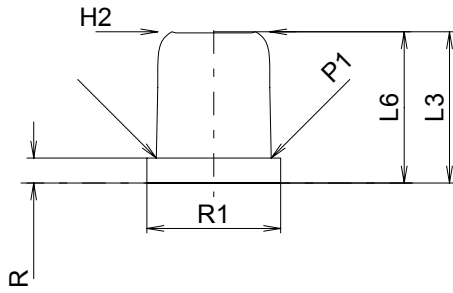


C.I.P.	22 Piexon	TAB.	VI
		Date	02-01-22
		Revision	02-05-15
Country of Origin: DE			
	<b>CARTRIDGE MAXI</b>	<b>CHAMBER MINI</b>	
	<b>Lengths</b> L1 = L2 = L3 <sup>1)</sup> = 10.00 L4 = L5 = L6 = 10.00  <b>Case Head</b> R = 1.65 R1 = 8.85 R3 = E = -0.20 E1 = e min = δ = f = β =  <b>Powder Chamber</b>  P1 = 7.59 P2 =  <b>Junction Cone</b> α = S = r1 min = r2 =  <b>Collar</b> H1 = H2 <sup>1)</sup> = 7.40  <b>Volumes [cm³]</b> VC =  Va 1 = 0.40 Va 2 =  <b>Pressures (Energies)</b> <b>Energy [Va1]</b> E <sub>max</sub> = 60.0 Joule E <sub>K</sub> = 64.0 Joule E <sub>E</sub> = 66.0 Joule  <b>Miscellaneous Dimensions</b> Fe = delta L =	<b>Lengths</b> L1 = L2 = L3 <sup>1)</sup> = 10.00  <b>Breech</b> R <sup>1)</sup> = 1.50 R1 = 9.00 R2 = R3 = r =  <b>Powder Chamber</b> E = P1 = 7.62 P2 =  <b>Junction Cone</b> α = S = r1 max = r2 =  <b>Collar</b> H1 = H2 = 7.42  <b>Commencement of Rifling</b> G1 = G = α1 = h = s = i = w =  <b>Barrel</b> F* = 7.42 Z = 7.42  <b>Volumes [cm³]</b> V(ET) = V(T) =	
Scale 2:1			
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 3.		Notes: 1) Check for safety reasons * Basic dimensions	