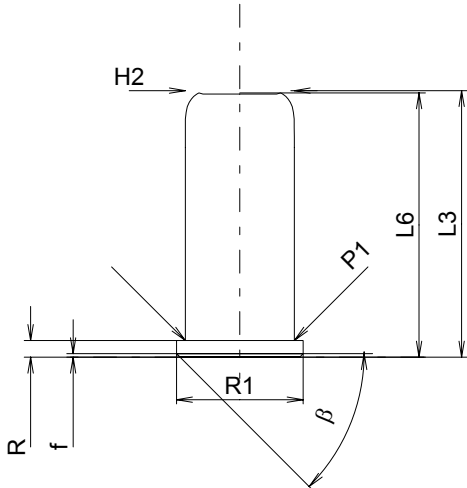
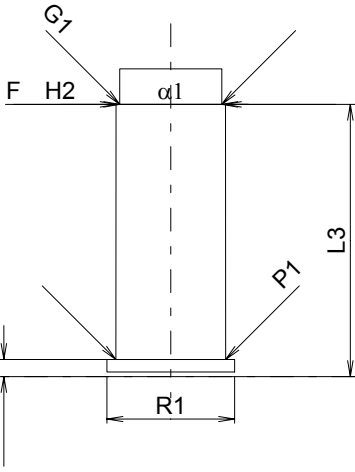


C.I.P.	38 SP (9 x 29) Country of Origin: US/IT	TAB.	VI
		Date	84-06-14
		Revision	94-05-31
	CARTRIDGE MAXI Lengths L1 = L2 = L3 ¹⁾ = 23.50 L4 = L5 = L6 = 23.30 Case Head R = 1.47 R1 = 11.17 R3 = E = E1 = e min = δ = f = 0.30 β = 45° Powder Chamber P1 = 9.62 P2 = Junction Cone α = S = r1 min = r2 = Collar H1 = H2 ¹⁾ = 9.62 Volumes [cm³] VC = 2.18 Va 1 = 0.40 Va 2 = Pressures (Energies) Method Transducer [Va1] Pmax = 3600 bar PK = 4140 bar PE = 4680 bar M = Miscellaneous Dimensions Fe = delta L =	CHAMBER MINI Lengths L1 = L2 = L3 ¹⁾ = 24.00 Breech R ¹⁾ = 1.50 R1 = 11.25 R2 = R3 = r = Powder Chamber E = P1 = 9.67 P2 = Junction Cone α = S = r1 max = r2 = Collar H1 = H2 = 9.65 Commencement of Rifling G1 * = 9.00 G = α1 * = 180° h = s = i = w = Barrel F * = 9.00 Z = 9.00 Volumes [cm³] V(ET) = 2.24 V(T) =	
			
Scale 1.5:1 Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 3.	Notes: 1) Check for safety reasons * Basic dimensions		