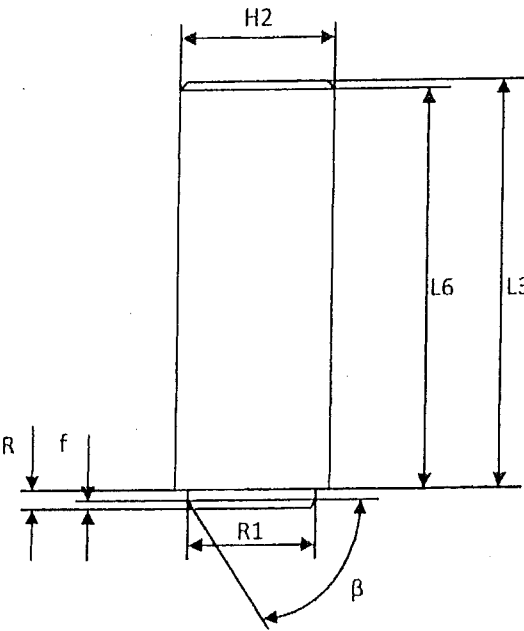
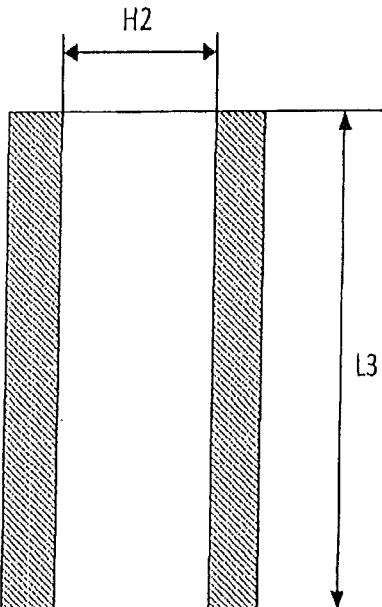


C.I.P.	PE 150 Country of Origin: FR	TAB. VI Date 10-05-26 Revision
	<p>CARTRIDGE MAXI</p> <p>Lengths</p> <p>L1 =</p> <p>L2 =</p> <p>L3 1) = 255.50</p> <p>L4 =</p> <p>L5 =</p> <p>L6 = 255.00</p> <p>Case Head</p> <p>R =</p> <p>R1 = 11.17</p> <p>R3 =</p> <p>E =</p> <p>E1 =</p> <p>e min =</p> <p>delta =</p> <p>f = 0.30</p> <p>beta = 45°</p> <p>Powder Chamber</p> <p>P1 =</p> <p>P2 =</p> <p>Junction Cone</p> <p>alpha =</p> <p>S =</p> <p>r1 min =</p> <p>r2 =</p> <p>Collar</p> <p>H1 =</p> <p>H2 1) = 12.65</p> <p>Volumes [cm³]</p> <p>VC =</p> <p>Va 1 =</p> <p>Va 2 =</p> <p>Energy</p> <p>E_{max} = 1360 Joule</p> <p>E_K = 1455 Joule</p> <p>E_E = 1496 Joule</p> <p>Miscellaneous Dimensions</p> <p>Fe =</p> <p>delta L =</p>	<p>CHAMBER MINI</p> <p>Lengths</p> <p>L1 =</p> <p>L2 =</p> <p>L3 1) = 237.00</p> <p>Breech</p> <p>R =</p> <p>R1 =</p> <p>R2 =</p> <p>R3 =</p> <p>r =</p> <p>Powder Chamber</p> <p>E =</p> <p>P1 =</p> <p>P2 =</p> <p>Junction Cone</p> <p>alpha =</p> <p>S =</p> <p>r1 max =</p> <p>r2 =</p> <p>Collar</p> <p>H1 =</p> <p>H2 = 12.80</p> <p>Commencement of Rifling</p> <p>G1 1)2) =</p> <p>G =</p> <p>alpha1 =</p> <p>h =</p> <p>s =</p> <p>i =</p> <p>w =</p> <p>Barrel</p> <p>F =</p> <p>Z =</p> <p>Volumes [cm³]</p> <p>V(ET) =</p> <p>V(T) =</p>
		
<p>Dimensions in << mm >></p> <p>Dimensions and Tolerances for Proof Barrels</p> <p>see Appendix .</p>		<p>Notes: 1) Check for safety reasons</p>