



C.I.P.**17 Rem. Fireball**

TAB. I

Date 08-04-15

Révision 11-05-25

Pays d'origine: US

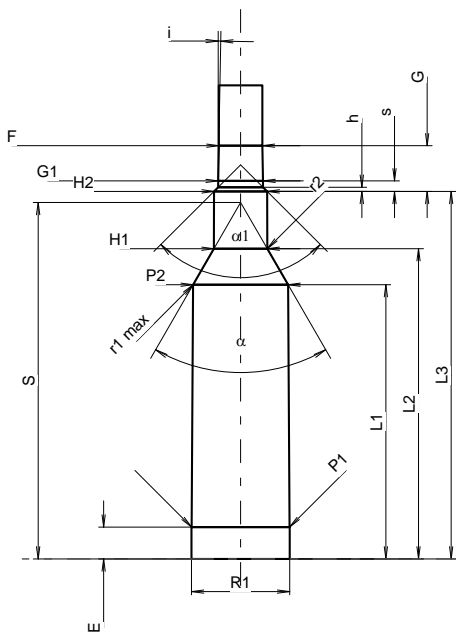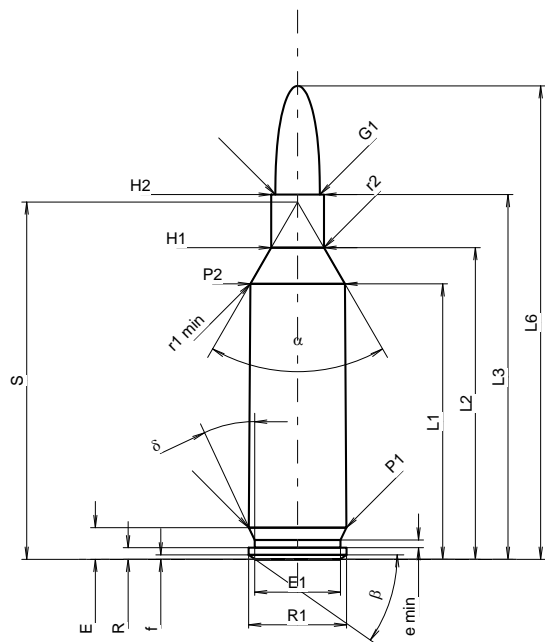

Échelle 1.35:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

CARTOUCHE MAXI**Longueurs**

L1 ¹⁾	=	27.05	-0.20
L2 ¹⁾	=	30.60	-0.20
L3 ¹⁾	=	35.81	
L4	=		
L5	=		
L6	=	46.48	

Culot

R	=	1.14	
R1	=	9.60	
R3	=		
E	=	3.12	
E1	=	8.43	
e min	=	0.76	
δ	=	25°	
f	=	0.45	
β	=	35°	

Chambre à poudre

P1	=	9.57	
P2 ¹⁾ *	=	9.28	-0.20

Cône de raccordement

α *	=	60°	
S *	=	35.08	
r1 min	=	0.64	
r2	=	2.54	

Collet

H1 *	=	5.18	
H2 ¹⁾	=	5.18	

Projectile

G1 ¹⁾	=	4.38	
G2	=		
F	=		
L3+G ¹⁾	=	40.29	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3800 bar	
PK	=	4370 bar	
PE	=	4750 bar	
M	=	17.50	
EE	=	980 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=	0.11	

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base

CHAMBRE MINI**Longueurs**

L1	=	26.92	
L2	=	30.45	
L3 ¹⁾	=	36.07	

Cuvette

R	=		
R1	=	9.63	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.12	
P1 ¹⁾	=	9.60	
P2 *	=	9.31	

Cône de raccordement

α ¹⁾ *	=	60°	
S *	=	34.98	
r1 max	=	0.64	
r2	=	3.18	

Collet

H1 *	=	5.23	
H2 ¹⁾	=	5.21	

Prise de rayures

G1 ¹⁾ *	=	4.39	
G ¹⁾	=	4.48	
α1 *	=	90°	
h	=	0.41	
s	=	1.04	
i ¹⁾ *	=	1°	
w	=		

Canon

F ¹⁾ *	=	4.27	
Z ¹⁾	=	4.37	

Rayures

b	=	1.57	
N	=	6	
u	=	228.60	
Q	=	14.80	mm ²