

C.I.P.**338 Lapua Mag.**

TAB.

I

Date



89-09-09

Révision

16-10-18

Pays d'origine: FI

Marquage alternatif: 8,6 (mm) x 70

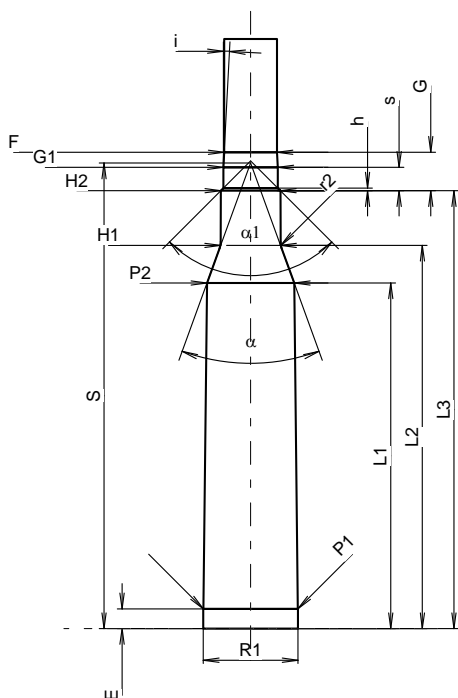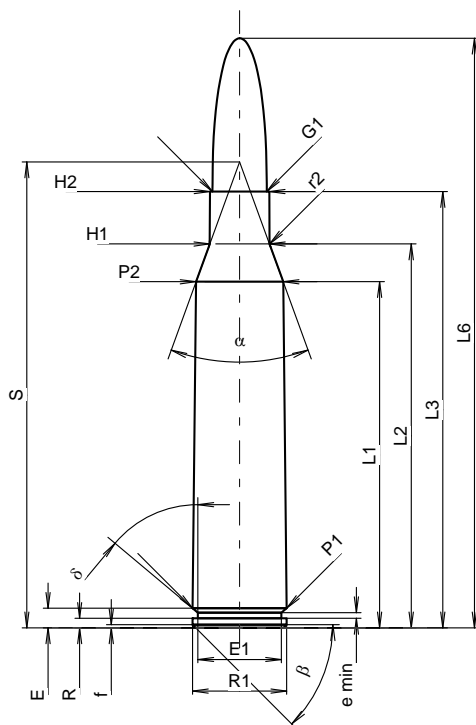

Échelle 1:1.2

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

CARTOUCHE MAXI**Longueurs**

L1 ¹⁾ *	=	54.90	-0.20
L2 ¹⁾ *	=	60.89	-0.20
L3 ¹⁾	=	69.20	
L4	=		
L5	=		
L6	=	93.50	

Culot

R	=	1.52	
R1	=	14.93	
R3	=		
E	=	3.12	
E1	=	13.24	
e min	=	0.90	
delta	=	50°04'48"	
f	=	0.50	
beta	=	45°	

Chambre à poudre

P1	=	14.91	
P2 ¹⁾ *	=	13.82	-0.20

Cône de raccordement

alpha	=	39°59'49"	
S	=	73.89	
r1 min	=		
r2	=	2.50	

Collet

H1 *	=	9.46	
H2 ¹⁾	=	9.41	

Projectile

G1 ¹⁾	=	8.61	
G2	=		
F	=		
L3+G ¹⁾	=	75.28	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4200 bar	
PK	=	4830 bar	
PE	=	5250 bar	
M	=	25.00	
EE	=	6600 Joule	

Autres indications

Fe ¹⁾³⁾	=	0.10	
delta L	=	0.05	

CHAMBRE MINI**Longueurs**

L1 *	=	54.81	
L2 *	=	60.77	
L3 ¹⁾	=	69.45	

Cuvette

R	=		
R1	=	15.03	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.12	
P1 ¹⁾	=	14.96	
P2 *	=	13.85	

Cône de raccordement

alpha ¹⁾	=	40°00'45"	
S	=	73.83	
r1 max	=		
r2	=	3.00	

Collet

H1 *	=	9.51	
H2 ¹⁾	=	9.45	

Prise de rayures

G1 ¹⁾ *	=	8.63	
G ¹⁾ *	=	6.08	
alpha1	=	90°	
h	=	0.41	
s *	=	3.70	
i ¹⁾	=	3°00'23"	
w	=		

Canon

F ¹⁾ *	=	8.38	
Z ¹⁾	=	8.58	

Rayures

b	=	2.79	
N	=	6	
u	=	254.00	
Q	=	56.86	mm ²

Notes: 1) A' contrôler pour la sécurité
3) Feuillure sur la cone de raccordement
* Dimensions de base