

**C.I.P.****35 Rem.**

TAB.

I


Datum

91-02-20

Revision

02-05-15

Ursprungsland: US

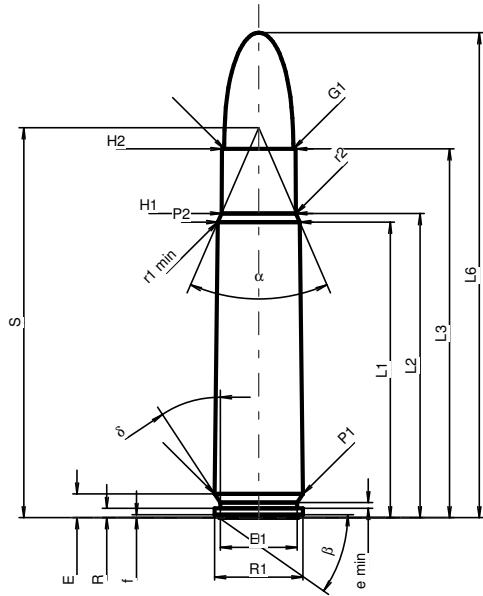**PATRONE MAXI****Längen**

L1 <sup>1)</sup>	=	39.10	-0.20
L2 <sup>1)</sup>	=	40.24	-0.20
L3 <sup>1)</sup>	=	48.77	
L4	=		
L5	=		
L6	=	64.14	

**Hülsenboden**

R	=	1.24	
R1	=	11.68	
R3	=		
E	=	3.14	
E1	=	10.16	
e min	=	0.76	
delta	=	34°	
f	=	0.41	
beta	=	35°	

**Pulverkammer**

P1	=	11.66	
P2 <sup>1)</sup> *	=	10.82	-0.20

**Schulterkonus**

alpha *	=	46°49'59"	
S *	=	51.59	
r1 min	=	0.64	
r2	=	1.27	

**Hülsenhals**

H1 *	=	9.83	
H2 <sup>1)</sup>	=	9.75	

**Geschoss**

G1 <sup>1)</sup>	=	9.12	
G2	=		
F	=		
L3+G <sup>1)</sup>	=	52.02	

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	2750 bar	
PK	=	3163 bar	
PE	=	3575 bar	
M	=	25.00	
EE	=	2655 Joule	

**Verschiedene Daten**

Fe <sup>1)3)</sup>	=	0.15	
delta L	=	0.13	

**PATRONENLAGER MINI****Längen**

L1	=	38.91	
L2	=	40.10	
L3 <sup>1)</sup>	=	48.88	

**Stoßboden**

R	=		
R1	=	11.78	
R2	=		
R3	=		
r	=		

**Pulverkammer**

E	=	3.14	
P1 <sup>1)</sup>	=	11.70	
P2 *	=	10.86	

**Schulterkonus**

alpha <sup>1)</sup> *	=	46°50'	
S *	=	51.45	
r1 max	=	0.64	
r2	=	1.27	

**Hülsenhals**

H1 *	=	9.83	
H2 <sup>1)</sup>	=	9.75	

**Geschossübergang**


G1 <sup>1)</sup> *	=	9.07	
G <sup>1)</sup>	=	3.25	
alpha 1 *	=	60°	
h	=	0.59	
s	=		
i <sup>1)</sup> *	=	2°15'32"	
w	=		

**Lauf**

F <sup>1)</sup> *	=	8.86	
Z <sup>1)</sup>	=	9.07	

**Züge**

b	=	2.92	
N	=	7	
u	=	406.00	
Q	=	63.84	mm <sup>2</sup>

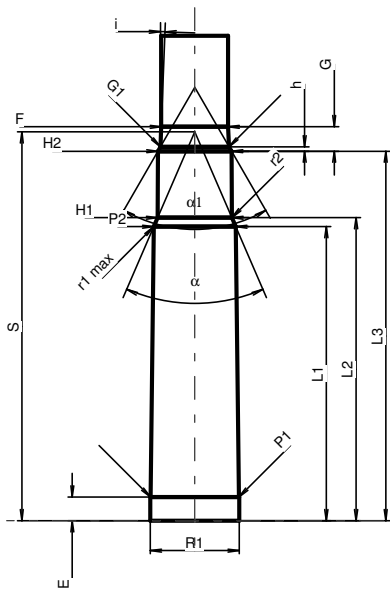

Maßstab 1:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
3) Verschussabstand an Schulter  
\* Grundmaße