

C.I.P.**35 Whelen**

Pays d'origine: US

TAB.


I

Date

94-03-01

Révision

24-05-14

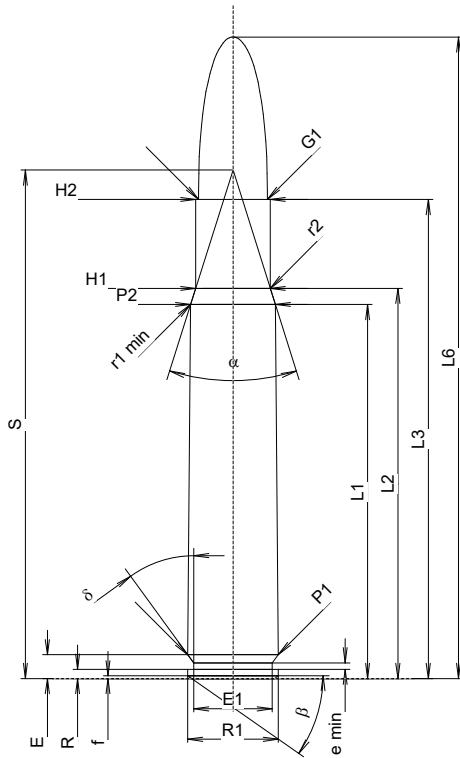**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	49.48	-0.20
L2 ¹⁾	=	51.60	-0.20
L3 ¹⁾	=	63.35	
L4	=		
L5	=		
L6	=	84.84	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.16	
E1	=	10.39	
e min	=	0.84	
delta	=	36°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	11.96	
P2 ¹⁾ *	=	11.20	-0.20

Cône de raccordement

alpha *	=	35°	
S *	=	67.24	
r1 min	=	1.27	
r2	=	2.54	

Collet

H1 *	=	9.86	
H2 ¹⁾	=	9.86	

Projectile

G1 ¹⁾	=	9.12	
G2	=		
F	=		
L3+G ¹⁾	=	73.56	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4000 bar	
PK	=	4600 bar	
PE	=	5000 bar	
M	=	25.00	
EE	=	4560 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=	0.15	

CHAMBRE MINI**Longueurs**

L1	=	49.27	
L2	=	51.37	
L3 ¹⁾	=	63.55	

Cuvette

R	=		
R1	=	12.04	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.16	
P1 ¹⁾	=	11.99	
P2 *	=	11.24	

Cône de raccordement

alpha ¹⁾ *	=	35°	
S *	=	67.09	
r1 max	=	1.27	
r2	=	2.54	

Collet

H1 *	=	9.91	
H2 ¹⁾	=	9.88	

Prise de rayures


G1 ¹⁾ *	=	9.14	
G ¹⁾	=	10.21	
alpha ¹⁾ *	=	60°	
h	=	0.64	
s	=	7.00	
i ¹⁾ *	=	2°30'	
w	=		

Canon

F ¹⁾ *	=	8.86	
Z ¹⁾	=	9.07	

Rayures

b	=	3.30	
N	=	6	
u	=	406.40	
Q	=	63.78	mm ²

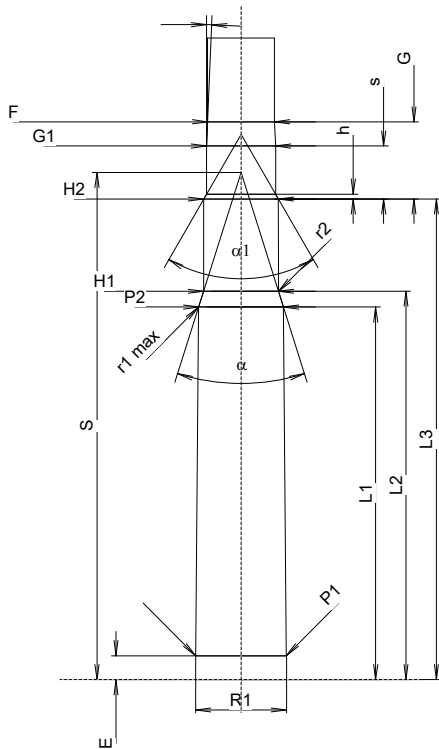

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base