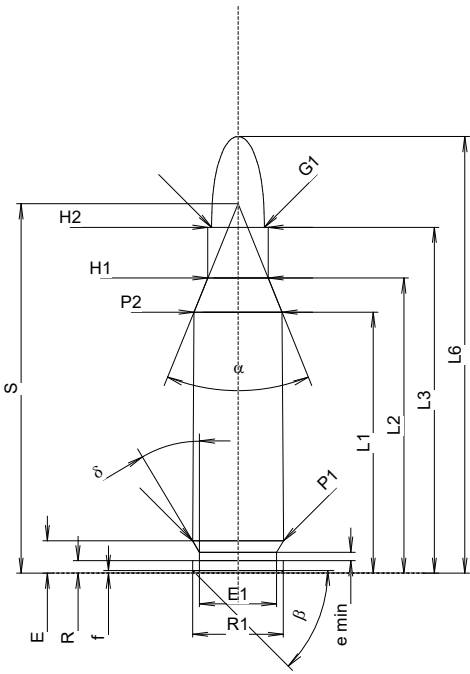
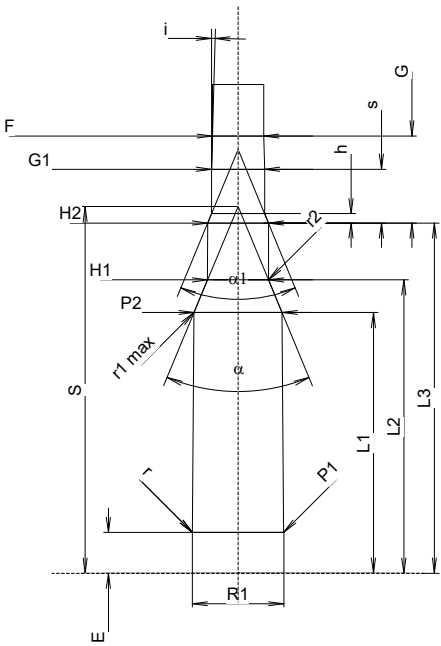


C.I.P.	4,6 x 30 Ursprungsland: DE	TAB. I
		Datum 04-05-18
		Revision 25-05-13
	PATRONE MAXI Längen L1 ¹⁾ * = 23.02 -0.20 L2 ¹⁾ * = 26.03 -0.20 L3 ¹⁾ = 30.50 L4 = L5 = L6 = 38.50 Hülsenboden R = 1.10 R1 = 8.00 R3 = E = 2.87 E1 = 6.80 e min = 0.75 δ = 31° f = 0.25 β = 45° Pulverkammer P1 = 8.02 P2 ¹⁾ * = 7.75 -0.20 Schulterkonus α = 44°07'37" S = 32.58 r1 min = r2 = Hülsenhals H1 * = 5.31 H2 ¹⁾ = 5.31 Geschoss G1 ¹⁾ = 4.65 G2 = F = L3+G ¹⁾ = 38.17 Drücke (Energien) Mech. elektr. Wandler Pmax = 4000 bar PK = 4600 bar PE = 5200 bar M = 17.50 Verschiedene Daten Fe ¹⁾³⁾ = 0.20 delta L =	PATRONENLAGER MINI Längen L1 * = 22.99 L2 * = 25.86 L3 ¹⁾ = 30.88 Stoßboden R = 3.20 R1 = 8.07 R2 = 3.00 R3 = r = 0.40 Pulverkammer E = 3.60 P1 ¹⁾ = 8.03 P2 * = 7.76 Schulterkonus α ¹⁾ = 45° S = 32.34 r1 max = 1.60 r2 = 2.30 Hülsenhals H1 * = 5.38 H2 ¹⁾ = 5.36 Geschossübergang G1 ¹⁾ * = 4.68 G ¹⁾ * = 7.67 α1 = 45° h = 0.82 s * = 4.74 i ¹⁾ = 1°22'7" w = Lauf F ¹⁾ * = 4.52 Z ¹⁾ = 4.62 Züge b = 1.21 N = 6 u = 160.00 Q = 16.52 mm ²
		
Maßstab 1.5:1		
Maße in << mm >> Maße und Toleranzen für Messläufe siehe Anhang CR-1.	Bemerkungen: 1) Kontrolle aus Sicherheitsgründen 3) Verschlussabstand an Schulter * Grundmaße	