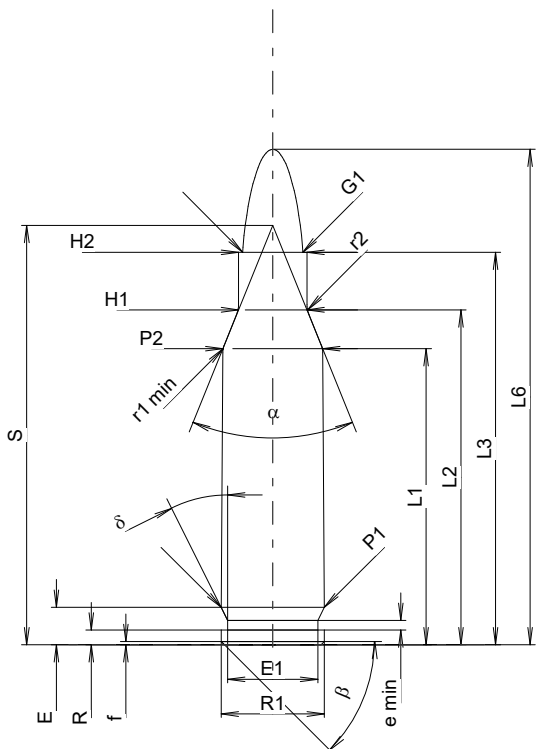
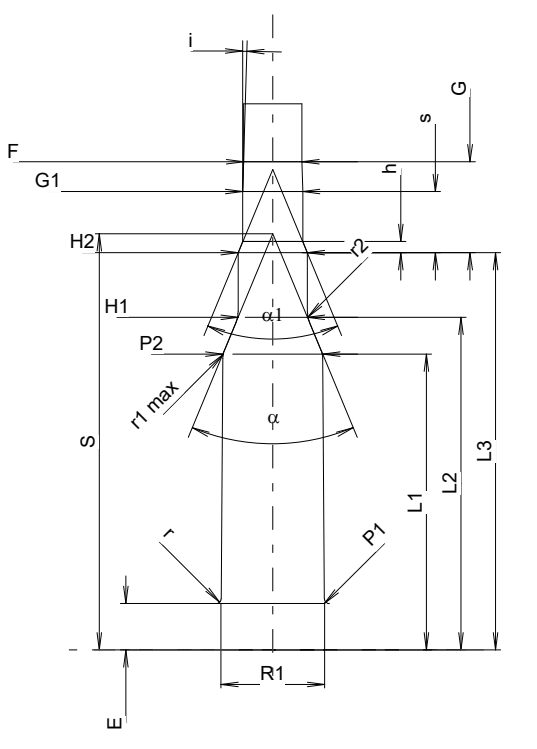


C.I.P.	4,6 x 30	TAB.	I
		Date	04-05-18
		Revision	25-03-17
Country of Origin: DE			
	CARTRIDGE MAXI		CHAMBER MINI
	Lengths L1 1)* = 23.02 -0.20 L2 1)* = 26.03 -0.20 L3 1)* = 30.50 L4 = L5 = L6 = 38.50 Case Head R = 1.14 R1 = 8.00 R3 = E = 2.91 E1 = 7.00 e min = 0.75 delta = 30° f = 0.25 beta = 45° Powder Chamber P1 = 8.02 P2 1)* = 7.75 -0.20 Junction Cone alpha = 44°07'37" S = 32.58 r1 min = 1.70 r2 = 2.00 Collar H1 * = 5.33 H2 1) = 5.33 Projectile G1 1) = 4.65 G2 = F = L3+G 1) = 37.55 Pressures (Energies) Method Transducer Pmax = 4000 bar PK = 4600 bar PE = 5000 bar M = 17.50 EE = 500 Joule Miscellaneous Dimensions Fe 1)3) = 0.10 delta L = 0.12		Lengths L1 * = 22.98 L2 * = 25.85 L3 1) = 30.88 Breech R = 3.15 R1 = 8.07 R2 = 3.00 R3 = r = 0.40 Powder Chamber E = 3.60 P1 1) = 8.03 P2 * = 7.76 Junction Cone alpha 1) = 45°02'28" S = 32.34 r1 max = 1.60 r2 = 2.30 Collar H1 * = 5.38 H2 1) = 5.36 Commencement of Rifling G1 1)* = 4.65 G 1)* = 7.05 alpha1 = 45° h = 0.86 s * = 4.74 i 1) = 1°36'42" w = Barrel F 1)* = 4.52 Z 1) = 4.65 Grooves b = 1.21 N = 6 u = 150.00 Q = 16.52 mm²
			
Scale 1.7:1		Notes: 1) Check for safety reasons 3) Headspace on Shoulder * Basic dimensions	
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix .			