


C.I.P.**7 x 44 Penna**

TAB. I

Datum 13-05-22

Ursprungsland: IT

Revision

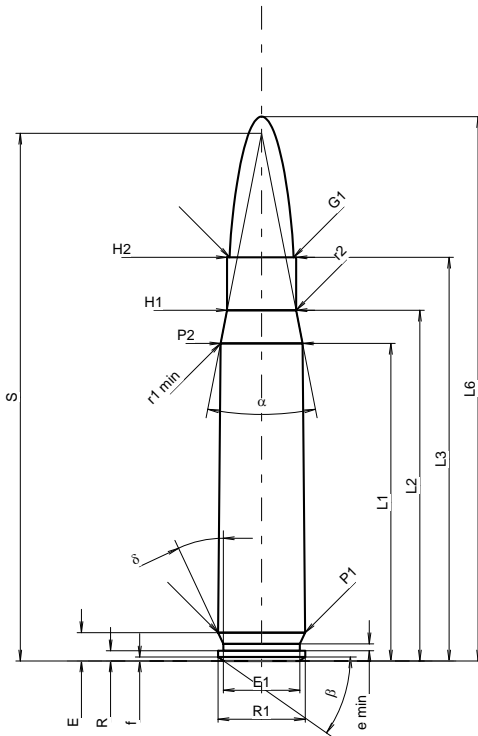**PATRONE MAXI****Längen**

L1 ¹⁾	=	35.00	-0.20
L2 ¹⁾	=	38.67	-0.20
L3 ¹⁾	=	44.50	
L4	=		
L5	=		
L6	=	60.00	

Hülsenboden

R	=	1.14	
R1	=	9.60	
R3	=		
E	=	3.13	
E1	=	8.43	
e min	=	0.76	
delta	=	25°	
f	=	0.45	
beta	=	35°	

Pulverkammer

P1	=	9.58	
P2 ¹⁾ *	=	9.03	-0.20

Schulterkonus

alpha *	=	22°02'56"	
S *	=	58.17	
r1 min	=	0.60	
r2	=	2.50	

Hülsenhals

H1 *	=	7.60	
H2 ¹⁾	=	7.60	

Geschoss

G1 ¹⁾	=	7.04	
G2	=		
F	=		
L3+G ¹⁾	=	59.66	

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	4400 bar	
PK	=	5060 bar	
PE	=	5500 bar	
M	=	25.00	
EE	=	2000 Joule	

Verschiedene Daten

Fe ¹⁾³⁾	=	0.10	
delta L	=	0.10	

PATRONENLAGER MINI**Längen**

L1	=	34.90	
L2	=	38.67	
L3 ¹⁾	=	44.40	

Stoßboden

R	=		
R1	=	9.63	
R2	=		
R3	=		
r	=		

Pulverkammer

E	=	3.13	
P1 ¹⁾	=	9.61	
P2 *	=	9.03	

Schulterkonus

alpha ¹⁾ *	=	21°11'03"	
S *	=	59.04	
r1 max	=	0.60	
r2	=	2.50	

Hülsenhals

H1 *	=	7.62	
H2 ¹⁾	=	7.62	

Geschossübergang


G1 ¹⁾ *	=	7.04	
G ¹⁾	=	15.16	
alpha l	=	180°	
h	=		
s *	=	10.00	
i ¹⁾ *	=	0°59'57"	
w	=		

Lauf

F ¹⁾ *	=	6.86	
Z ¹⁾	=	7.03	

Züge

b	=	0.85	
N	=	6	
u	=	254.00	
Q	=	37.40	mm ²

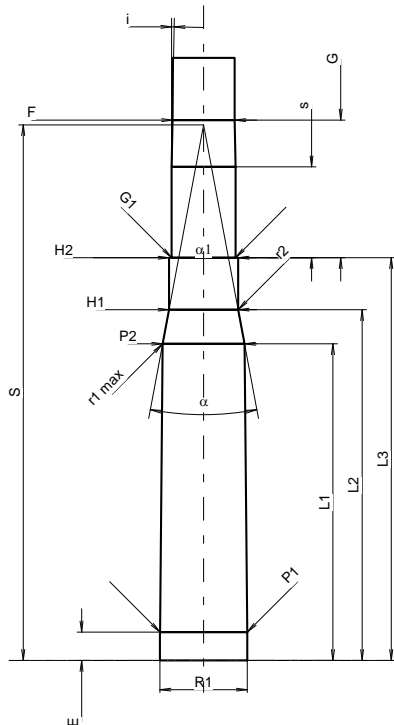

Maßstab 1.2:1

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
3) Verschlussabstand an Schulter
* Grundmaße