

C.I.P.**8 x 57 I**



TAB. I

Date 84-06-14

Pays d'origine: DE

Révision 25-05-13

Marquage alternatif: 8 x 57 J

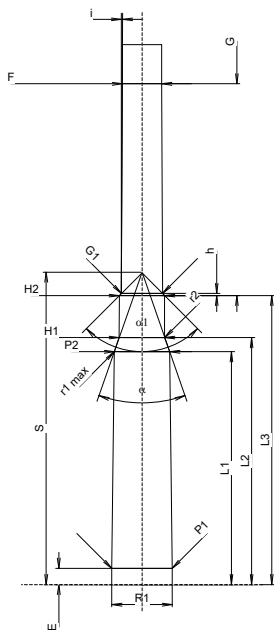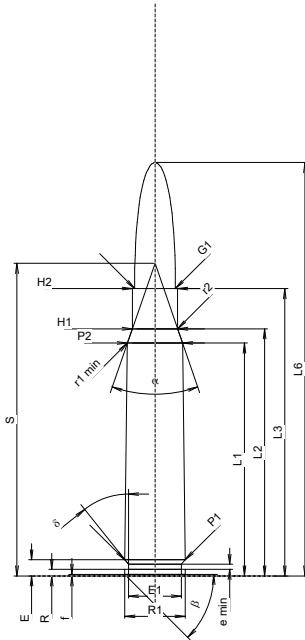

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

CARTOUCHE MAXI**Longueurs**

| | | | |
|--------|---|-------|-------|
| L1 1)* | = | 46.20 | -0.20 |
| L2 1)* | = | 49.03 | -0.20 |
| L3 1) | = | 57.00 | |
| L4 | = | | |
| L5 | = | | |
| L6 | = | 82.00 | |

Culot

| | | | |
|-------|---|-------------|--|
| R | = | 1.30 | |
| R1 | = | 11.95 | |
| R3 | = | | |
| E | = | 3.20 | |
| E1 | = | 10.50 | |
| e min | = | 1.00 | |
| delta | = | -38.660000° | |
| f | = | 0.30 | |
| beta | = | 45° | |

Chambre à poudre

| | | | |
|--------|---|-------|-------|
| P1 | = | 11.94 | |
| P2 1)* | = | 10.95 | -0.20 |

Cône de raccordement

| | | | |
|--------|---|-----------|--|
| alpha | = | 38°12'02" | |
| S | = | 62.01 | |
| r1 min | = | 0.50 | |
| r2 | = | 0.50 | |

Collet

| | | | |
|-------|---|------|--|
| H1 * | = | 8.99 | |
| H2 1) | = | 8.99 | |

Projectile

| | | | |
|---------|---|-------|--|
| G1 1) | = | 8.09 | |
| G2 | = | | |
| F | = | | |
| L3+G 1) | = | 99.00 | |

Pressions (Énergies)**Méthode transducteur**

| | | | |
|------|---|------------|--|
| Pmax | = | 3800 bar | |
| PK | = | 4370 bar | |
| PE | = | 4750 bar | |
| M | = | 25.00 | |
| EE | = | 3950 Joule | |

Autres indications

| | | | |
|---------|---|------|--|
| Fe 1) | = | 0.15 | |
| delta L | = | | |

CHAMBRE MINI**Longueurs**

| | | | |
|-------|---|-------|--|
| L1 * | = | 46.16 | |
| L2 * | = | 48.98 | |
| L3 1) | = | 57.30 | |

Cuvette

| | | | |
|----|---|-------|--|
| R | = | 1.30 | |
| R1 | = | 12.00 | |
| R2 | = | | |
| R3 | = | | |
| r | = | | |

Chambre à poudre

| | | | |
|-------|---|-------|--|
| E | = | 3.20 | |
| P1 1) | = | 11.97 | |
| P2 * | = | 10.98 | |

Cône de raccordement

| | | | |
|----------|---|-----------|--|
| alpha 1) | = | 38°19'33" | |
| S | = | 61.96 | |
| r1 max | = | 0.50 | |
| r2 | = | 0.50 | |

Collet

| | | | |
|-------|---|------|--|
| H1 * | = | 9.02 | |
| H2 1) | = | 9.01 | |

Prise de rayures

| | | | |
|--------|---|----------|--|
| G1 1)* | = | 8.15 | |
| G 1)* | = | 42.00 | |
| alpha1 | = | 90° | |
| h * | = | 0.43 | |
| s | = | | |
| i 1) | = | 0°14'27" | |
| w | = | | |

Canon

| | | | |
|-------|---|------|--|
| F 1)* | = | 7.80 | |
| Z 1) | = | 8.07 | |

Rayures

| | | | |
|---|---|--------|-----------------|
| b | = | 4.40 | |
| N | = | 4 | |
| u | = | 240.00 | |
| Q | = | 50.30 | mm ² |

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base