

C.I.P.**9,3 x 57**

TAB.

I



Datum

07-05-14

Revision

11-05-25

Ursprungsland: DE

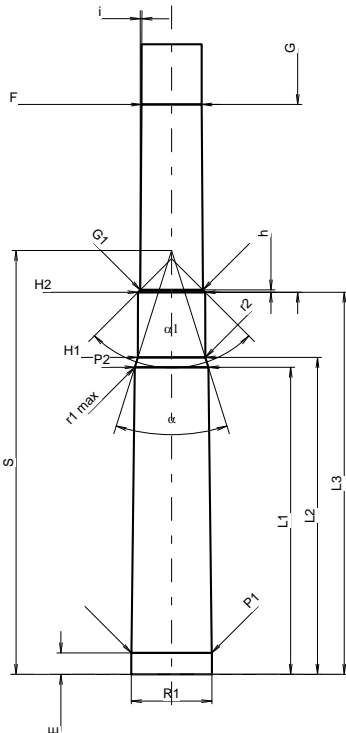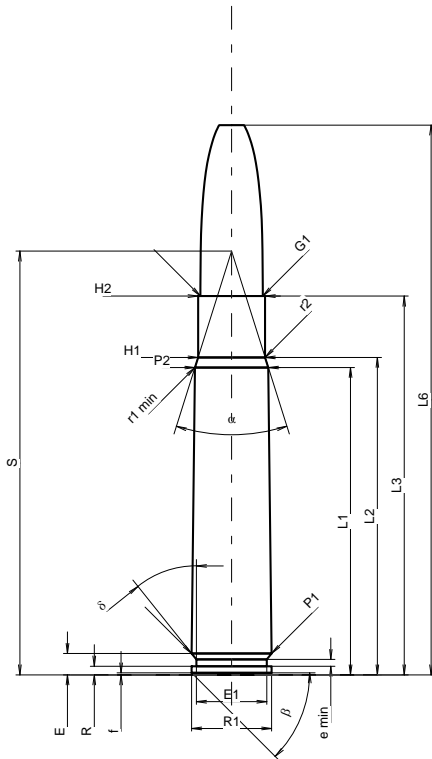

Maßstab 1:1.13

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

PATRONE MAXI**Längen**

L1 ¹⁾	=	45.85	-0.20
L2 ¹⁾	=	47.36	-0.20
L3 ¹⁾	=	56.50	
L4	=		
L5	=		
L6	=	82.00	

Hülsenboden

R	=	1.30	
R1	=	11.95	
R3	=		
E	=	3.20	
E1	=	10.50	
e min	=	1.00	
delta	=	38°39'36"	
f	=	0.30	
beta	=	45°	

Pulverkammer

P1	=	11.94	
P2 ¹⁾ *	=	10.95	-0.20

Schulterkonus

alpha *	=	35°	
S *	=	63.22	
r1 min	=	0.50	
r2	=	0.50	

Hülsenhals

H1 *	=	10.00	
H2 ¹⁾	=	10.00	

Geschoss

G1 ¹⁾	=	9.30	
G2	=		
F	=		
L3+G ¹⁾	=	84.50	

Drücke (Energien)**Crusher-Methode**

Pmax	=	3000 bar	
PK	=	3450 bar	
PE	=	3750 bar	
M	=	25.00	
EE	=	4250 Joule	

Verschiedene Daten

Fe ¹⁾³⁾	=	0.15	
delta L	=		

PATRONENLAGER MINI**Längen**

L1	=	45.81	
L2	=	47.28	
L3 ¹⁾	=	57.00	

Stoßboden

R	=	1.30	
R1	=	12.00	
R2	=		
R3	=		
r	=		

Pulverkammer

E	=	3.20	
P1 ¹⁾	=	11.97	
P2 *	=	10.98	

Schulterkonus

alpha ¹⁾ *	=	35°	
S *	=	63.22	
r1 max	=	0.50	
r2	=	0.50	

Hülsenhals

H1 *	=	10.05	
H2 ¹⁾	=	10.03	

Geschossübergang

G1 ¹⁾ *	=	9.35	
G ¹⁾	=	28.00	
alpha1 ¹⁾	=	90°	
h	=	0.34	
s	=		
i ¹⁾ *	=	0°21'45"	
w	=		

Lauf

F ¹⁾ *	=	9.00	
Z ¹⁾	=	9.28	

Züge

b	=	4.60	
N	=	4	
u	=	360.00	
Q	=	66.32	mm ²

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
3) Verschlussabstand an Schulter
* Grundmaße