



C.I.P.**6 x 51 ATZL**

Ursprungsland: AT

TAB. I

Datum 97-11-05

Revision 02-05-15

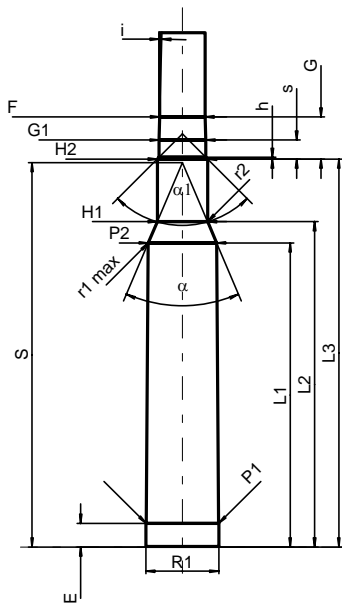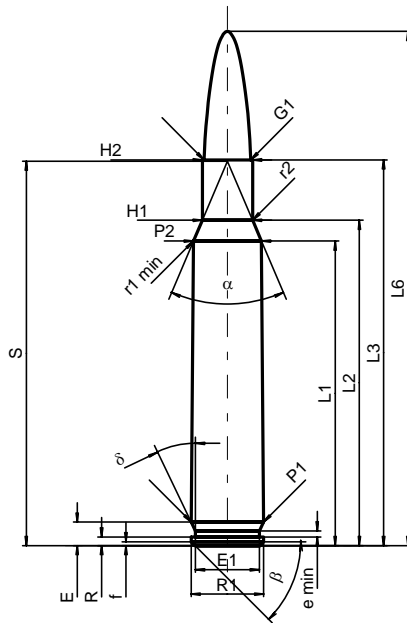

Maßstab 1:1

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

PATRONE MAXI**Längen**

L1 ^{1)*}	=	40.27	-0.20
L2 ^{1)*}	=	43.03	-0.20
L3 ¹⁾	=	51.00	
L4	=		
L5	=		
L6	=	68.00	

Hülsenboden

R	=	1.14	
R1	=	9.60	
R3	=		
E	=	3.10	
E1	=	8.44	
e min	=	0.80	
δ	=	25°46'09"	
f	=	0.50	
β	=	45°	

Pulverkammer

P1	=	9.56	
P2 ^{1)*}	=	9.00	-0.20

Schulterkonus

α	=	46°07'17"	
S	=	50.84	
r1 min	=	0.50	
r2	=	0.50	

Hülsenhals

H1 [*]	=	6.65	
H2 ¹⁾	=	6.65	

Geschoss

G1 ¹⁾	=	6.17	
G2	=		
F	=		
L3+G ¹⁾	=	56.57	

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	4050 bar	
PK	=	4658 bar	
PE	=	5060 bar	
M	=	25.00	
EE	=	2100 Joule	

Verschiedene Daten

Fe ¹⁾	=	0.10	
delta L	=		

PATRONELAGER MINI**Längen**

L1 [*]	=	40.22	
L2 [*]	=	43.02	
L3 ¹⁾	=	51.30	

Stoßboden

R	=	1.14	
R1	=	9.64	
R2	=		
R3	=		
r	=		

Pulverkammer

E	=	3.11	
P1 ¹⁾	=	9.59	
P2 [*]	=	9.03	

Schulterkonus

α ¹⁾	=	46°03'04"	
S	=	50.84	
r1 max	=	0.50	
r2	=	0.50	

Hülsenhals

H1 [*]	=	6.65	
H2 ¹⁾	=	6.65	

Geschossübergang

G1 ^{1)*}	=	6.18	
G ^{1)*}	=	5.57	
α1	=	90°	
h	=	0.23	
s	=	2.52	
i ¹⁾	=	1°30'09"	
w	=		

Lauf

F ^{1)*}	=	6.02	
Z ¹⁾	=	6.17	

Züge

b	=	2.29	
N	=	6	
u	=	356.00	
Q	=	29.52	mm ²

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße