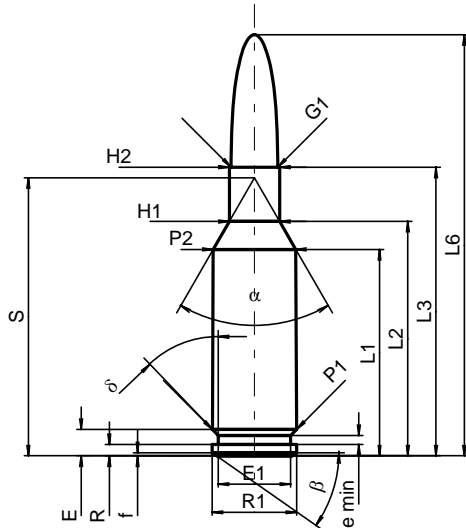


**C.I.P.****6 mm PPC**

Ursprungsland: US

<b>TAB.</b>	<b>I</b>
<b>Datum</b>	<b>84-06-14</b>
<b>Revision</b>	<b>02-05-15</b>

**PATRONE MAXI****Längen**

L1 <sup>1)</sup>	=	27.30	-0.20
L2 <sup>1)</sup>	=	31.00	-0.20
L3 <sup>1)</sup>	=	38.18	
L4	=		
L5	=		
L6	=	55.70	

**Hülsenboden**

R	=	1.50
R1	=	11.18
R3	=	
E	=	3.50
E1	=	9.60
e min	=	1.20
δ	=	43°43'12"
f	=	0.40
β	=	35°

**Pulverkammer**

P1	=	11.13	
P2 <sup>1)*</sup>	=	10.92	-0.20

**Schulterkonus**

α*	=	60°
S*	=	36.76
r1 min	=	
r2	=	

**Hülsenhals**

H1*	=	6.65
H2 <sup>1)</sup>	=	6.65

**Geschoss**

G1 <sup>1)</sup>	=	6.17
G2	=	
F	=	
L3+G <sup>1)</sup>	=	43.76

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	4050 bar
PK	=	4658 bar
PE	=	5060 bar
M	=	17.50
EE	=	2250 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.10
delta L	=	

**PATRONENLAGER MINI****Längen**

L1	=	27.30
L2	=	31.02
L3 <sup>1)</sup>	=	38.86

**Stoßboden**

R	=	
R1	=	11.20
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	3.50
P1 <sup>1)</sup>	=	11.17
P2*	=	10.95

**Schulterkonus**

α <sup>1)*</sup>	=	60°
S*	=	36.78
r1 max	=	1.52
r2	=	1.52

**Hülsenhals**

H1*	=	6.65
H2 <sup>1)</sup>	=	6.65

**Geschossübergang**


G1 <sup>1)*</sup>	=	6.18
G <sup>1)</sup>	=	5.58
α1*	=	90°
h	=	0.24
s	=	2.52
i <sup>1)*</sup>	=	1°30'
w	=	

**Lauf**

F <sup>1)*</sup>	=	6.02
Z <sup>1)</sup>	=	6.17

**Züge**

b	=	2.29
N	=	6
u	=	551.00
Q	=	29.52 mm <sup>2</sup>

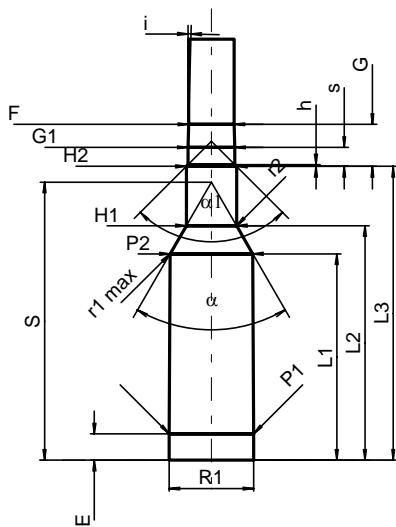

Maßstab 1:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße