


**C.I.P.****460 Steyr**

TAB. I

Datum 06-05-16

Ursprungsland: AT

Revision

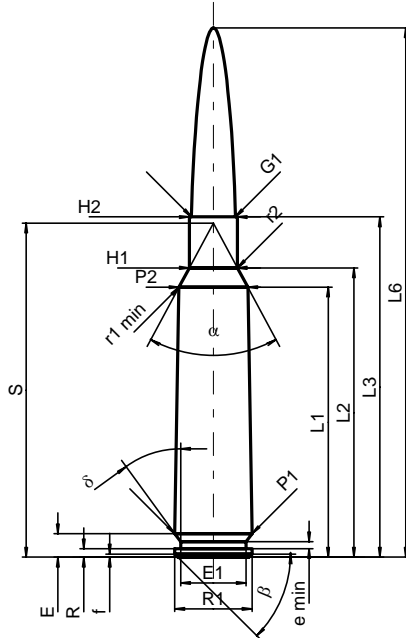**PATRONE MAXI****Längen**

L1 <sup>1)</sup>	=	71.40	-0.20
L2 <sup>1)</sup>	=	76.53	-0.20
L3 <sup>1)</sup>	=	90.00	
L4	=		
L5	=		
L6	=	140.00	

**Hülsenboden**

R	=	2.26	
R1	=	20.42	
R3	=		
E	=	6.23	
E1	=	17.27	
e min	=	1.80	
delta	=	36°	
f	=	0.84	
beta	=	45°	

**Pulverkammer**

P1	=	20.42	
P2 <sup>1)*</sup>	=	18.25	-0.20

**Schulterkonus**

alpha*	=	56°38'53"	
S*	=	88.33	
r1 min	=	1.00	
r2	=	3.00	

**Hülsenhals**

H1*	=	12.72	
H2 <sup>1)</sup>	=	12.72	

**Geschoss**

G1 <sup>1)*</sup>	=	11.65	
G2	=		
F*	=	11.43	
L3+G <sup>1)</sup>	=	105.30	

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	3700 bar	
PK	=	4255 bar	
PE	=	4625 bar	
M	=	40.00	
EE	=	15000 Joule	

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.15	
delta L	=		

**PATRONENLAGER MINI****Längen**

L1	=	71.43	
L2	=	76.56	
L3 <sup>1)</sup>	=	91.00	

**Stoßboden**

R	=		
R1	=	20.52	
R2	=		
R3	=		
r	=		

**Pulverkammer**

E	=	6.23	
P1 <sup>1)</sup>	=	20.45	
P2*	=	18.30	

**Schulterkonus**

alpha <sup>1)*</sup>	=	55°57'13"	
S*	=	88.66	
r1 max	=	1.00	
r2	=	3.00	

**Hülsenhals**

H1*	=	12.85	
H2 <sup>1)</sup>	=	12.75	

**Geschossübergang**


G1 <sup>1)*</sup>	=	11.65	
G <sup>1)</sup>	=	15.30	
alpha1	=	90°	
h	=	0.55	
s*	=	6.50	
i <sup>1)*</sup>	=	0°42'58"	
w	=		

**Lauf**

F <sup>1)*</sup>	=	11.43	
Z <sup>1)</sup>	=	11.63	

**Züge**

b	=	3.81	
N	=	6	
u	=	356.00	
Q	=	104.94	mm <sup>2</sup>

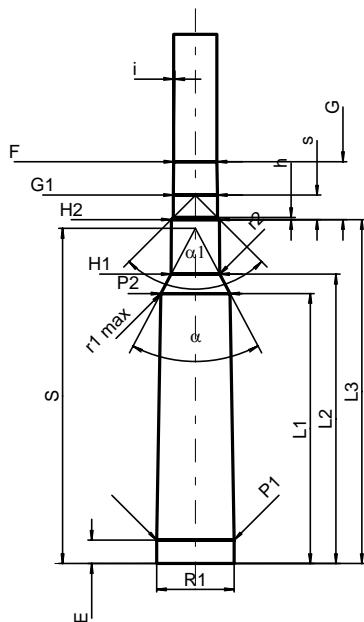

Maßstab 1:2

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße