


C.I.P.**6,5 x 68**

TAB. I

Datum 84-06-14

Revision 02-05-15

Ursprungsland: DE

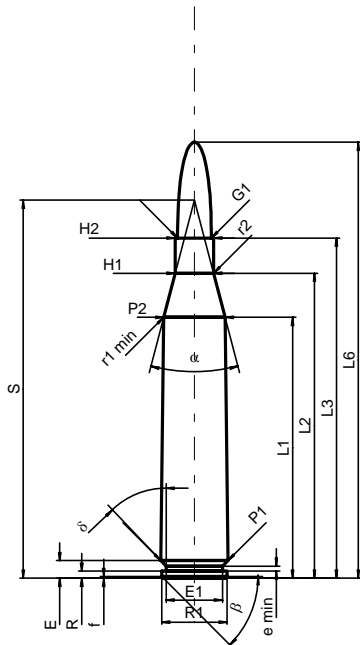**PATRONE MAXI****Längen**

L1 ¹⁾ *	=	51.75	-0.20
L2 ¹⁾ *	=	60.50	-0.20
L3 ¹⁾	=	67.50	
L4	=		
L5	=	67.90	
L6	=	86.50	

Hülsenboden

R	=	1.40	
R1	=	13.00	
R3	=		
E	=	3.50	
E1	=	11.20	
e min	=	1.00	
delta	=	43°40'12"	
f	=	0.30	
beta	=	45°	

Pulverkammer

P1	=	13.30	
P2 ¹⁾ *	=	12.18	-0.20

Schulterkonus

alpha	=	29°19'56"	
S	=	75.02	
r1 min	=	0.50	
r2	=	0.50	

Hülsenhals

H1 *	=	7.60	
H2	=	7.60	

Geschoss

G1 ¹⁾	=	6.70	
G2 ¹⁾	=	6.70	
F	=		
L3+G ¹⁾	=	97.50	

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	4400 bar	
PK	=	5060 bar	
PE	=	5500 bar	
M	=	25.00	
EE	=	4045 Joule	

Verschiedene Daten

Fe ¹⁾	=	0.10	
delta L	=		

PATRONENLAGER MINI**Längen**

L1 *	=	51.70	
L2 *	=	60.45	
L3 ¹⁾	=	67.80	

Stoßboden

R	=	1.40	
R1	=	13.05	
R2	=		
R3	=		
r	=		

Pulverkammer

E	=	3.50	
P1 ¹⁾	=	13.33	
P2 *	=	12.21	

Schulterkonus

alpha	=	29°19'56"	
S	=	75.03	
r1 max	=	0.50	
r2	=	0.50	

Hülsenhals

H1 *	=	7.63	
H2 ¹⁾	=	7.62	

Geschossübergang


G1 ¹⁾ *	=	6.75	
G ¹⁾ *	=	30.00	
alpha1	=	180°	
h	=		
s	=		
i ¹⁾	=	0°17'11"	
w	=		

Lauf

F ¹⁾ *	=	6.45	
Z ¹⁾	=	6.70	

Züge

b	=	3.50	
N	=	4	
u	=	250.00	
Q	=	34.52	mm ²

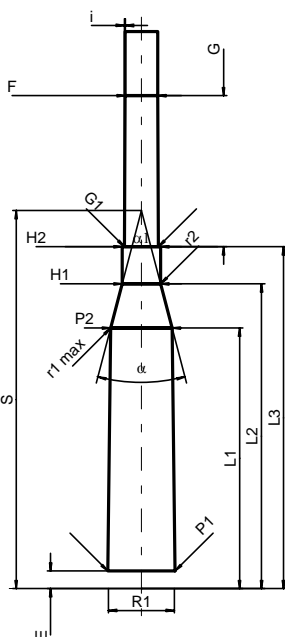

Maßstab 1:1.5

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße