

# C.I.P.


## 220 Swift

Ursprungsland: US

TAB. I

Datum 84-06-14

Revision 08-09-23

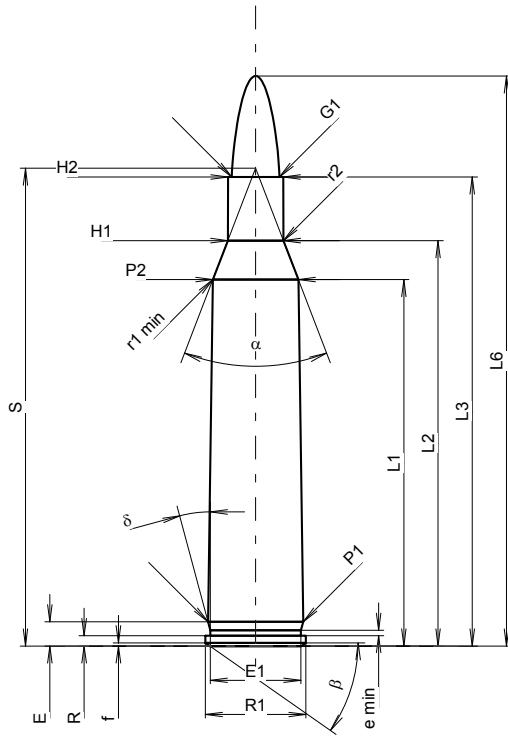**PATRONE MAXI****Längen**

L1 <sup>1)</sup>	=	43.76	-0.20
L2 <sup>1)</sup>	=	48.41	-0.20
L3 <sup>1)</sup>	=	56.01	
L4	=		
L5	=		
L6	=	68.07	

**Hülsenboden**

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	2.89	
E1	=	10.82	
e min	=	0.64	
delta	=	15°	
f	=	0.38	
beta	=	35°	

**Pulverkammer**

P1	=	11.36	
P2 <sup>1)</sup> *	=	10.21	-0.20

**Schulterkonus**

alpha <sup>*</sup>	=	42°	
S <sup>*</sup>	=	57.06	
r1 min	=	0.76	
r2	=	2.54	

**Hülsenhals**

H1 <sup>*</sup>	=	6.64	
H2 <sup>1)</sup>	=	6.60	

**Geschoss**

G1 <sup>1)</sup>	=	5.70	
G2	=		
F	=		
L3+G <sup>1)</sup>	=	60.22	

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	4300 bar	
PK	=	4945 bar	
PE	=	5375 bar	
M	=	25.00	
EE	=	2380 Joule	

**Verschiedene Daten**

Fe <sup>1)3)</sup>	=	0.10	
delta L	=	0.10	

**PATRONENLAGER MINI****Längen**

L1	=	43.62	
L2	=	48.27	
L3 <sup>1)</sup>	=	56.16	

**Stoßboden**

R	=	1.35	
R1	=	12.27	
R2	=		
R3	=		
r	=		

**Pulverkammer**

E	=	1.35	
P1 <sup>1)</sup>	=	11.43	
P2 <sup>*</sup>	=	10.24	

**Schulterkonus**

alpha <sup>1)</sup> *	=	42°	
S <sup>*</sup>	=	56.96	
r1 max	=	0.76	
r2	=	3.81	

**Hülsenhals**

H1 <sup>*</sup>	=	6.67	
H2 <sup>1)</sup>	=	6.63	

**Geschossübergang**


G1 <sup>1)</sup> *	=	5.74	
G <sup>1)</sup>	=	4.21	
alpha 1	=	60°	
h <sup>*</sup>	=	0.77	
s	=		
i <sup>1)</sup> *	=	1°30'	
w	=		

**Lauf**

F <sup>1)</sup> *	=	5.56	
Z <sup>1)</sup>	=	5.69	

**Züge**

b	=	1.88	
N	=	6	
u	=	356.00	
Q	=	25.03	mm <sup>2</sup>

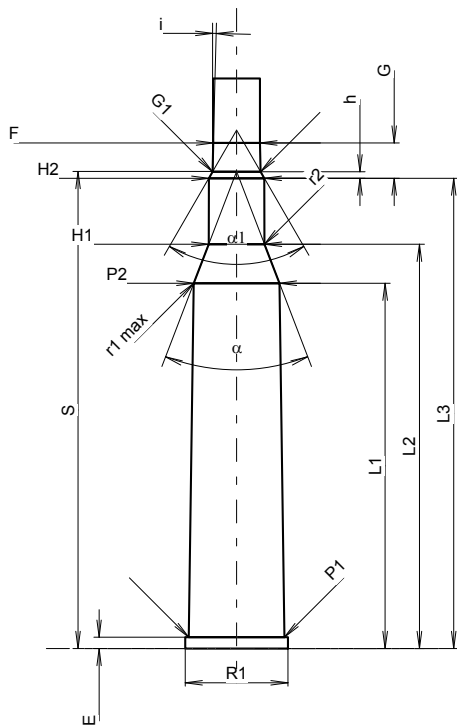

Maßstab 1.11:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
3) Verschlussabstand an Schulter  
\* Grundmaße