



**C.I.P.****223 Win. Super Short Mag.**

TAB. I

Datum 04-05-18

Revision 08-09-23

Ursprungsland: US

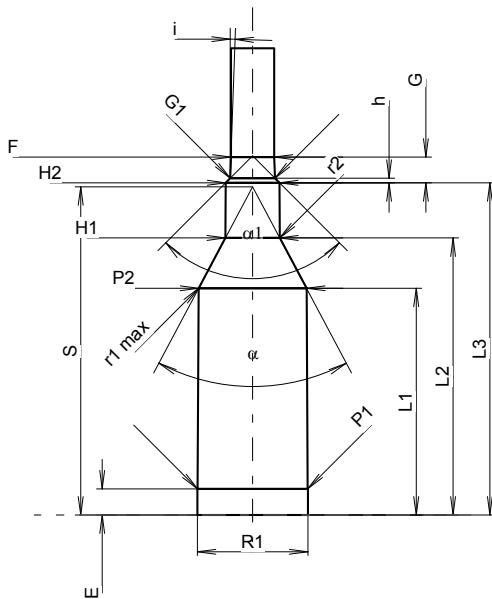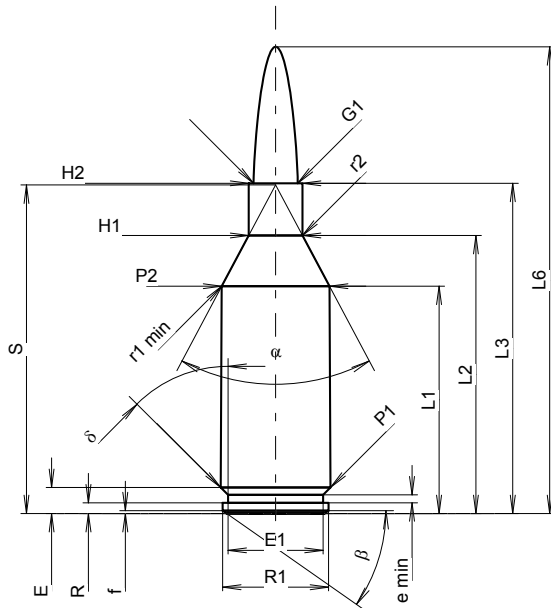

Maßstab 1.03:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

**PATRONE MAXI****Längen**

L1 <sup>1)</sup>	=	29.20	-0.20
L2 <sup>1)</sup>	=	35.71	-0.20
L3 <sup>1)</sup>	=	42.42	
L4	=		
L5	=		
L6	=	59.94	

**Hülsenboden**

R	=	1.37	
R1	=	13.59	
R3	=		
E	=	3.35	
E1	=	12.19	
e min	=	1.02	
delta	=	45°	
f	=	0.36	
beta	=	35°	

**Pulverkammer**

P1	=	14.12	
P2 <sup>1)</sup> *	=	13.83	-0.20

**Schulterkonus**

alpha *	=	56°	
S *	=	42.21	
r1 min	=	1.27	
r2	=	3.30	

**Hülsenhals**

H1 *	=	6.91	
H2 <sup>1)</sup>	=	6.91	

**Geschoss**

G1 <sup>1)</sup>	=	5.70	
G2	=		
F	=		
L3+G <sup>1)</sup>	=	45.73	

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	4400 bar	
PK	=	5060 bar	
PE	=	5500 bar	
M	=	25.00	
EE	=	2600 Joule	

**Verschiedene Daten**

Fe <sup>3)</sup>	=	0.10	
delta L	=	0.08	

**PATRONENLAGER MINI****Längen**

L1	=	29.12	
L2	=	35.58	
L3 <sup>1)</sup>	=	42.67	

**Stoßboden**

R	=		
R1	=	14.20	
R2	=		
R3	=		
r	=		

**Pulverkammer**

E	=	3.35	
P1 <sup>1)</sup>	=	14.15	
P2 *	=	13.86	

**Schulterkonus**

alpha <sup>1)</sup> *	=	56°	
S *	=	42.15	
r1 max	=	1.27	
r2	=	4.06	

**Hülsenhals**

H1 *	=	6.99	
H2 <sup>1)</sup>	=	6.93	

**Geschossübergang**

G1 <sup>1)</sup> *	=	5.75	
G <sup>1)</sup>	=	3.31	
alpha 1 *	=	90°	
h	=	0.59	
s	=		
i <sup>1)</sup> *	=	2°	
w	=		

**Lauf**

F <sup>1)</sup> *	=	5.56	
Z <sup>1)</sup>	=	5.69	

**Züge**

b	=	2.03	
N	=	6	
u	=	254.00	
Q	=	25.09	mm <sup>2</sup>

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
3) Verschlussabstand an Schulter  
\* Grundmaße