

C.I.P.**30 Rem.**

TAB.

I

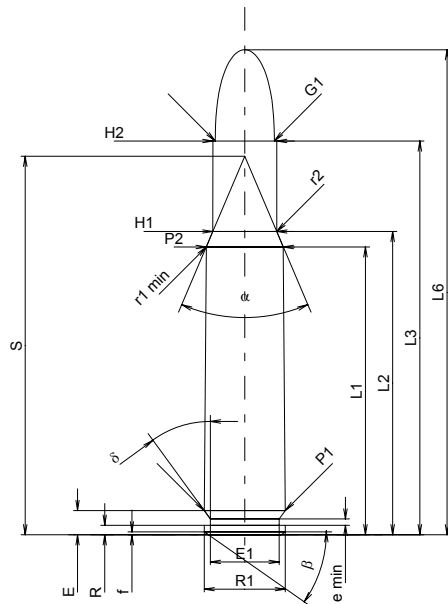
Date

84-06-14

Pays d'origine: US

Révision

02-05-15

**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	38.05	-0.20
L2 ¹⁾	=	40.10	-0.20
L3 ¹⁾	=	52.07	
L4	=		
L5	=		
L6	=	64.14	

Culot

R	=	1.24	
R1	=	10.72	
R3	=		
E	=	3.19	
E1	=	9.09	
e min	=	0.84	
delta	=	36°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	10.71	
P2 ^{1)*}	=	10.19	-0.20

Cône de raccordement

alpha*	=	46°	
S*	=	50.05	
r1 min	=	0.64	
r2	=	2.54	

Collet

H1*	=	8.45	
H2 ¹⁾	=	8.43	

Projectile

G1 ¹⁾	=	7.80	
G2	=		
F	=		
L3+G ¹⁾	=	55.29	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	2800 bar	
PK	=	3220 bar	
PE	=	3500 bar	
M	=	25.00	
EE	=	2745 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=		

CHAMBRE MINI**Longueurs**

L1	=	38.01	
L2	=	40.07	
L3 ¹⁾	=	52.20	

Cuvette

R	=		
R1	=	10.80	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.19	
P1 ¹⁾	=	10.75	
P2*	=	10.22	

Cône de raccordement

alpha ^{1)*}	=	46°	
S*	=	50.05	
r1 max	=	0.64	
r2	=	2.54	

Collet

H1*	=	8.47	
H2 ¹⁾	=	8.44	

Prise de rayures

G1 ^{1)*}	=	7.80	
G ¹⁾	=	3.22	
alpha1*	=	60°	
h	=	0.55	
s	=		
i ^{1)*}	=	1°55'59"	
w	=		

Canon

F ^{1)*}	=	7.62	
Z ¹⁾	=	7.77	

Rayures

b	=	2.67	
N	=	7	
u	=	305.00	
Q	=	47.04	mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base