


C.I.P.**30 - 284 Win.**

TAB. I

Date 98-02-09

Pays d'origine: US

Révision 02-05-15

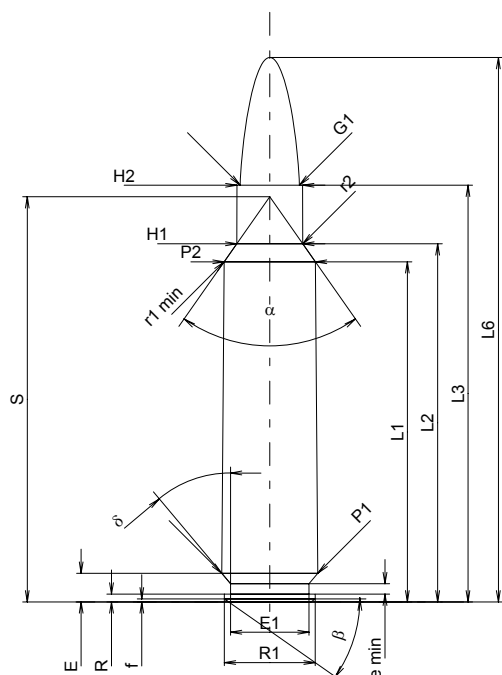**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	44.98	-0.20
L2 ¹⁾	=	47.36	-0.20
L3 ¹⁾	=	55.10	
L4	=		
L5	=		
L6	=	72.00	

Culot

R	=	1.02	
R1	=	12.01	
R3	=		
E	=	3.78	
E1	=	10.39	
e min	=	1.37	
delta	=	40°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	12.72	
P2 ^{1)*}	=	12.06	-0.20

Cône de raccordement

alpha*	=	70°	
S*	=	53.59	
r1 min	=	0.80	
r2	=	3.20	

Collet

H1*	=	8.72	
H2 ¹⁾	=	8.67	

Projectile

G1 ¹⁾	=	7.85	
G2	=		
F ¹⁾	=		
L3+G	=	62.08	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3800 bar	
PK	=	4370 bar	
PE	=	4750 bar	
M	=	25.00	
EE	=	4300 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=		

CHAMBRE MINI**Longueurs**

L1	=	44.96	
L2	=	47.34	
L3 ¹⁾	=	55.30	

Cuvette

R	=		
R1	=	12.04	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.78	
P1 ¹⁾	=	12.75	
P2*	=	12.09	

Cône de raccordement

alpha ^{1)*}	=	70°	
S*	=	53.59	
r1 max	=	0.80	
r2	=	3.20	

Collet

H1*	=	8.75	
H2 ¹⁾	=	8.70	

Prise de rayures


G1 ^{1)*}	=	7.87	
G ¹⁾	=	6.98	
alpha1	=	90°	
h	=	0.42	
s*	=	2.89	
i ^{1)*}	=	1°45'	
w	=		

Canon

F ^{1)*}	=	7.62	
Z ¹⁾	=	7.82	

Rayures

b	=	4.47	
N	=	4	
u	=	305.00	
Q	=	47.51	mm ²

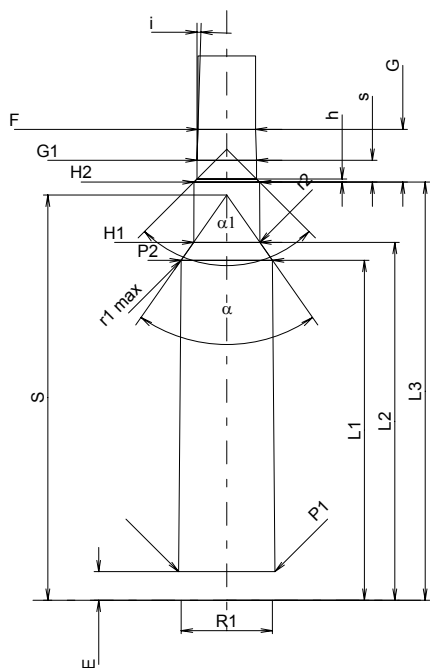

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base