


C.I.P.**460 Steyr**

TAB. I

Date 06-05-16

Pays d'origine: AT

Révision

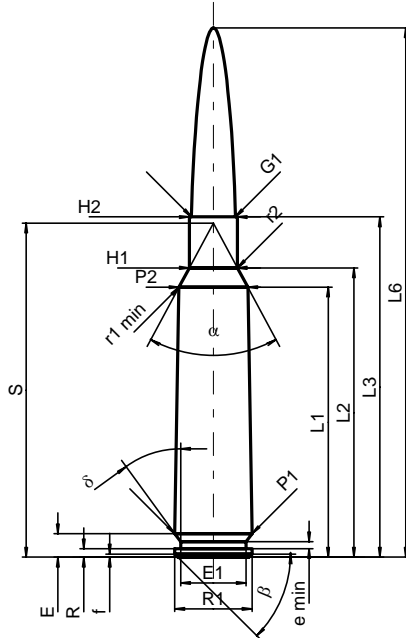**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	71.40	-0.20
L2 ¹⁾	=	76.53	-0.20
L3 ¹⁾	=	90.00	
L4	=		
L5	=		
L6	=	140.00	

Culot

R	=	2.26	
R1	=	20.42	
R3	=		
E	=	6.23	
E1	=	17.27	
e min	=	1.80	
delta	=	36°	
f	=	0.84	
beta	=	45°	

Chambre à poudre

P1	=	20.42	
P2 ^{1)*}	=	18.25	-0.20

Cône de raccordement

alpha*	=	56°38'53"	
S*	=	88.33	
r1 min	=	1.00	
r2	=	3.00	

Collet

H1*	=	12.72	
H2 ¹⁾	=	12.72	

Projectile

G1 ^{1)*}	=	11.65	
G2	=		
F*	=	11.43	
L3+G ¹⁾	=	105.30	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3700 bar	
PK	=	4255 bar	
PE	=	4625 bar	
M	=	40.00	
EE	=	15000 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=		

CHAMBRE MINI**Longueurs**

L1	=	71.43	
L2	=	76.56	
L3 ¹⁾	=	91.00	

Cuvette

R	=		
R1	=	20.52	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	6.23	
P1 ¹⁾	=	20.45	
P2*	=	18.30	

Cône de raccordement

alpha ^{1)*}	=	55°57'13"	
S*	=	88.66	
r1 max	=	1.00	
r2	=	3.00	

Collet

H1*	=	12.85	
H2 ¹⁾	=	12.75	

Prise de rayures


G1 ^{1)*}	=	11.65	
G ¹⁾	=	15.30	
alpha1	=	90°	
h	=	0.55	
s*	=	6.50	
i ^{1)*}	=	0°42'58"	
w	=		

Canon

F ^{1)*}	=	11.43	
Z ¹⁾	=	11.63	

Rayures

b	=	3.81	
N	=	6	
u	=	356.00	
Q	=	104.94	mm ²

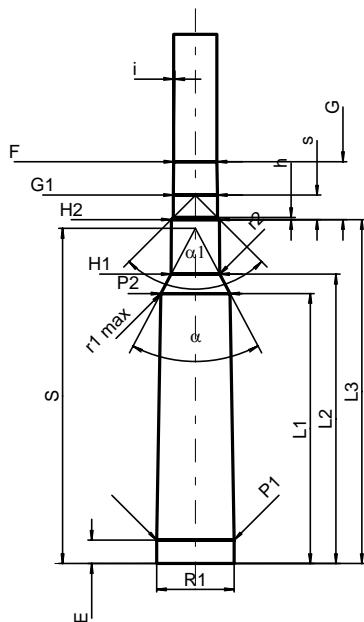

Échelle 1:2

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A contrôler pour la sécurité
* Dimensions de base