


C.I.P.**6 mm Rem. (244 Rem.)**

TAB. I

Date 84-06-14

Pays d'origine: US

Révision 02-05-15

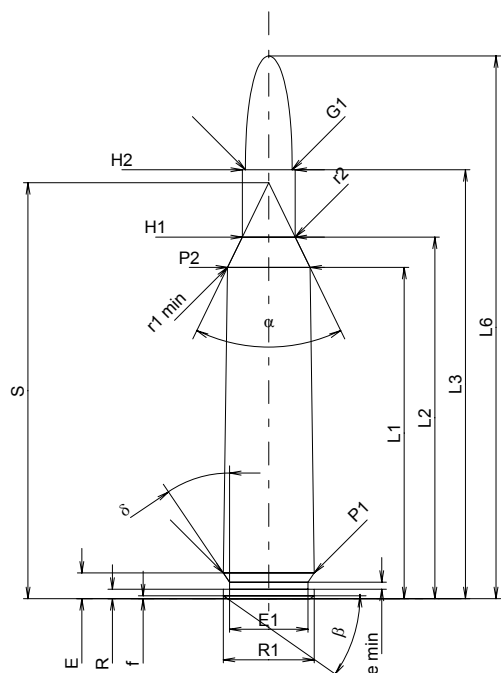**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	43.81	-0.20
L2 ¹⁾	=	47.81	-0.20
L3 ¹⁾	=	56.72	
L4	=		
L5	=		
L6	=	71.76	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.40	
E1	=	10.36	
e min	=	0.94	
delta	=	34°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	12.01	
P2 ^{1)*}	=	10.91	-0.20

Cône de raccordement

alpha*	=	52°	
S*	=	55.00	
r1 min	=	0.64	
r2	=	2.54	

Collet

H1*	=	7.01	
H2 ¹⁾	=	7.01	

Projectile

G1 ¹⁾	=	6.18	
G2	=		
F	=		
L3+G ¹⁾	=	61.24	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4300 bar	
PK	=	4945 bar	
PE	=	5375 bar	
M	=	25.00	
EE	=	3180 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=	0.10	

CHAMBRE MINI**Longueurs**

L1	=	43.66	
L2	=	47.66	
L3 ¹⁾	=	57.25	

Cuvette

R	=		
R1	=	12.14	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.40	
P1 ¹⁾	=	12.04	
P2*	=	10.96	

Cône de raccordement

alpha ^{1)*}	=	52°	
S*	=	54.90	
r1 max	=	0.64	
r2	=	3.18	

Collet

H1*	=	7.06	
H2 ¹⁾	=	7.04	

Prise de rayures


G1 ^{1)*}	=	6.19	
G ¹⁾	=	4.52	
alpha1*	=	90°	
h	=	0.43	
s	=	3.00	
i ^{1)*}	=	3°	
w	=		

Canon

F ^{1)*}	=	6.02	
Z ¹⁾	=	6.17	

Rayures

b	=	2.29	
N	=	6	
u	=	228.60	
Q	=	29.48	mm ²

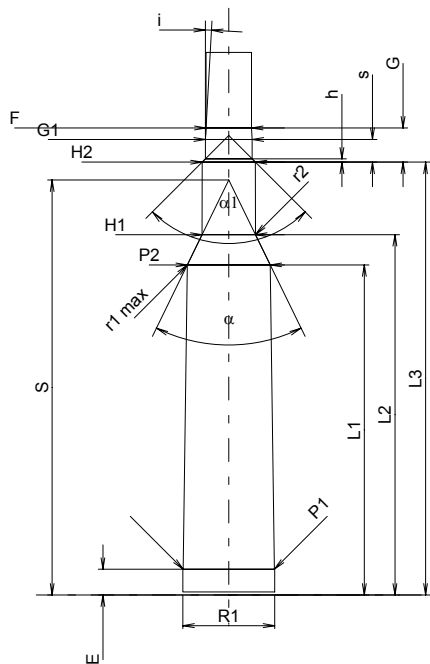

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base