

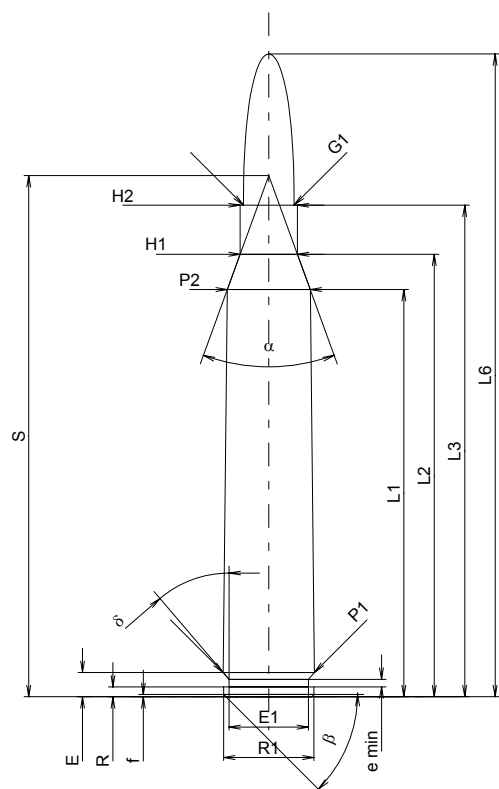
**C.I.P.****6,5 x 65 RWS**

TAB. I

Date 90-04-05

Pays d'origine: DE

Révision 02-05-15

**CARTOUCHE MAXI****Longueurs**

|                   |   |       |       |
|-------------------|---|-------|-------|
| L1 <sup>1)*</sup> | = | 53.85 | -0.20 |
| L2 <sup>1)*</sup> | = | 58.52 | -0.20 |
| L3 <sup>1)</sup>  | = | 65.00 |       |
| L4                | = |       |       |
| L5                | = |       |       |
| L6                | = | 85.00 |       |

**Culot**

|       |   |        |  |
|-------|---|--------|--|
| R     | = | 1.30   |  |
| R1    | = | 11.95  |  |
| R3    | = |        |  |
| E     | = | 3.20   |  |
| E1    | = | 10.50  |  |
| e min | = | 1.00   |  |
| delta | = | 40°33' |  |
| f     | = | 0.30   |  |
| beta  | = | 45°    |  |

**Chambre à poudre**

|                   |   |       |       |
|-------------------|---|-------|-------|
| P1                | = | 12.04 |       |
| P2 <sup>1)*</sup> | = | 10.97 | -0.20 |

**Cône de raccordement**

|        |   |           |  |
|--------|---|-----------|--|
| alpha  | = | 40°00'02" |  |
| S      | = | 68.92     |  |
| r1 min | = |           |  |
| r2     | = |           |  |

**Collet**

|                  |   |      |  |
|------------------|---|------|--|
| H1*              | = | 7.57 |  |
| H2 <sup>1)</sup> | = | 7.57 |  |

**Projectile**

|                    |   |       |  |
|--------------------|---|-------|--|
| G1 <sup>1)</sup>   | = | 6.70  |  |
| G2                 | = |       |  |
| F                  | = |       |  |
| L3+G <sup>1)</sup> | = | 74.96 |  |

**Pressions (Énergies)****Méthode transducteur**

|      |   |            |  |
|------|---|------------|--|
| Pmax | = | 4150 bar   |  |
| PK   | = | 4773 bar   |  |
| PE   | = | 5190 bar   |  |
| M    | = | 25.00      |  |
| EE   | = | 3955 Joule |  |

**Autres indications**

|                  |   |      |  |
|------------------|---|------|--|
| Fe <sup>1)</sup> | = | 0.10 |  |
| delta L          | = |      |  |

**CHAMBRE MINI****Longueurs**

|                  |   |       |  |
|------------------|---|-------|--|
| L1*              | = | 53.81 |  |
| L2*              | = | 58.44 |  |
| L3 <sup>1)</sup> | = | 65.30 |  |

**Cuvette**

|    |   |       |  |
|----|---|-------|--|
| R  | = | 1.30  |  |
| R1 | = | 12.07 |  |
| R2 | = |       |  |
| R3 | = |       |  |
| r  | = |       |  |

**Chambre à poudre**

|                  |   |       |  |
|------------------|---|-------|--|
| E                | = | 3.20  |  |
| P1 <sup>1)</sup> | = | 12.07 |  |
| P2*              | = | 11.00 |  |

**Cône de raccordement**

|                     |   |           |  |
|---------------------|---|-----------|--|
| alpha <sup>1)</sup> | = | 39°59'45" |  |
| S                   | = | 68.92     |  |
| r1 max              | = |           |  |
| r2                  | = |           |  |

**Collet**

|                  |   |      |  |
|------------------|---|------|--|
| H1*              | = | 7.63 |  |
| H2 <sup>1)</sup> | = | 7.60 |  |

**Prise de rayures**

|                   |   |       |  |
|-------------------|---|-------|--|
| G1 <sup>1)*</sup> | = | 6.71  |  |
| G <sup>1)*</sup>  | = | 9.96  |  |
| alpha1            | = | 90°   |  |
| h                 | = | 0.44  |  |
| s*                | = | 5.00  |  |
| i <sup>1)</sup>   | = | 1°30' |  |
| w                 | = |       |  |

**Canon**

|                  |   |      |  |
|------------------|---|------|--|
| F <sup>1)*</sup> | = | 6.45 |  |
| Z <sup>1)</sup>  | = | 6.70 |  |

**Rayures**

|   |   |        |                 |
|---|---|--------|-----------------|
| b | = | 3.50   |                 |
| N | = | 4      |                 |
| u | = | 200.00 |                 |
| Q | = | 34.52  | mm <sup>2</sup> |

Échelle 1:1

Dimensions en << mm >>  
Dimensions et tolérances pour les canons  
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité  
\* Dimensions de base