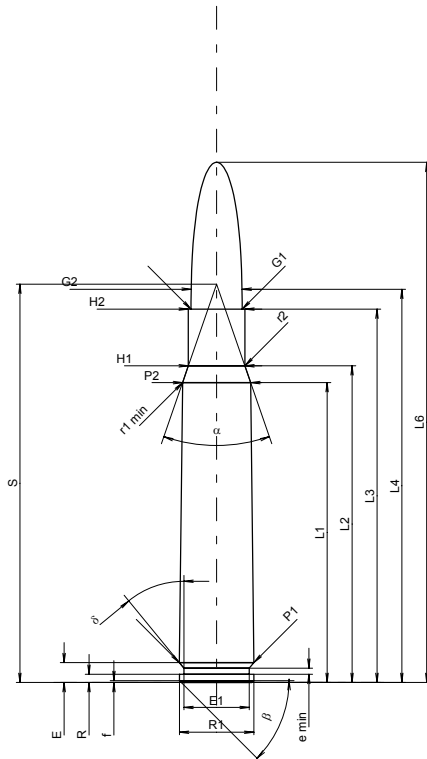


C.I.P.**8 x 60 S****TAB.****I****Date****84-06-14****Révision****06-09-19**

Pays d'origine: DE

**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾ *	=	48.20	-0.20
L2 ¹⁾ *	=	50.90	-0.20
L3 ¹⁾	=	60.00	
L4	=	63.20	
L5	=		
L6	=	83.60	

Culot

R	=	1.30	
R1	=	11.95	
R3	=		
E	=	3.20	
E1	=	10.50	
e min	=	1.00	
delta	=	39°25'48"	
f	=	0.30	
beta	=	45°	

Chambre à poudre

P1	=	11.98	
P2 ¹⁾ *	=	10.95	-0.20

Cône de raccordement

alpha	=	38°12'06"	
S	=	64.01	
r1 min	=	0.50	
r2	=	0.50	

Collet

H1 [*]	=	9.08	
H2 ¹⁾	=	9.08	

Projectile

G1 ¹⁾	=	8.22	
G2	=	8.18	
F	=		
L3+G ¹⁾	=	94.00	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4050 bar	
PK	=	4658 bar	
PE	=	5060 bar	
M	=	25.00	
EE	=	4285 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=		

CHAMBRE MINI**Longueurs**

L1 [*]	=	48.16	
L2 [*]	=	50.85	
L3 ¹⁾	=	60.30	

Cuvette

R	=	1.30	
R1	=	12.00	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.20	
P1	=	12.01	
P2 ¹⁾	=	10.98	

Cône de raccordement

alpha ¹⁾	=	38°20'	
S	=	63.95	
r1 max	=	0.50	
r2	=	0.50	

Collet

H1 [*]	=	9.11	
H2 ¹⁾	=	9.10	

Prise de rayures


G1 ¹⁾ *	=	8.23	
G ¹⁾ *	=	34.00	
alpha l	=	180°	
h	=		
s	=		
i ¹⁾	=	0°17'11"	
w	=		

Canon

F ¹⁾ *	=	7.89	
Z ¹⁾	=	8.20	

Rayures

b	=	4.40	
N	=	4	
u	=	240.00	
Q	=	51.78	mm ²

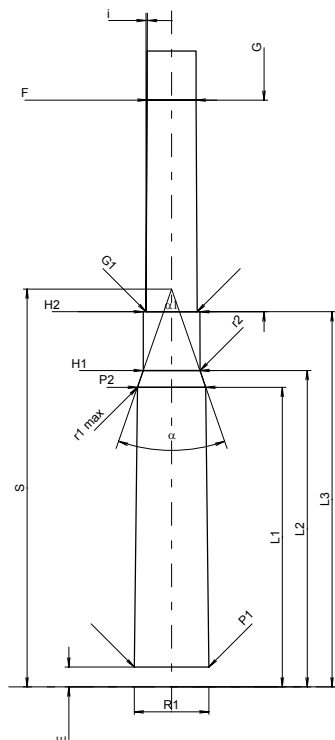

Échelle 1:1.21

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base