

**C.I.P.****40-65 Win.**

TAB.


II

Datum

17-05-17

Ursprungsland: US

Revision

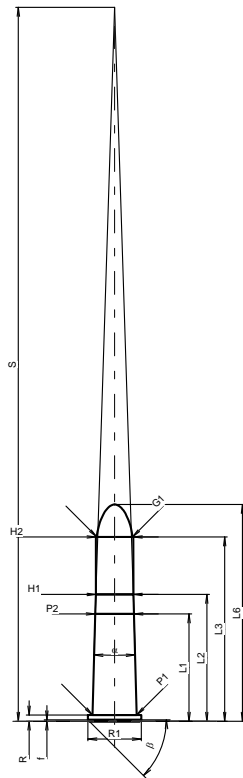**PATRONE MAXI****Längen**

L1	=	31.07
L2	=	36.71
L3 <sup>1)</sup>	=	53.34
L4	=	
L5	=	
L6	=	62.74

**Hülsenboden**

R <sup>1)</sup>	=	1.78	-0.25
R1	=	15.44	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.38	
beta	=	45°	

**Pulverkammer**

P1	=	12.80
P2 *	=	11.21

**Schulterkonus**

alpha *	=	3°39'21"
S *	=	206.69
r1 min	=	
r2	=	

**Hülsenhals**

H1 *	=	10.85
H2 <sup>1)</sup>	=	10.83

**Geschoss**

G1 <sup>1)</sup>	=	10.31
G2	=	
F	=	
L3+G <sup>1)</sup>	=	54.63

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	2100 bar
PK	=	2415 bar
PE	=	2625 bar
M	=	25.00
EE	=	3300 Joule

**Verschiedene Daten**

Fe <sup>1)4)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1	=	30.76
L2	=	36.17
L3 <sup>1)</sup>	=	53.64

**Stoßboden**

R <sup>1)</sup>	=	1.78
R1	=	15.49
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	12.83
P2 *	=	11.29

**Schulterkonus**

alpha *	=	4°01'22"
S *	=	191.49
r1 max	=	
r2	=	

**Hülsenhals**

H1 *	=	10.91
H2 <sup>1)</sup>	=	10.88

**Geschossübergang**


G1 <sup>1)</sup> *	=	10.34
G <sup>1)</sup>	=	1.29
alpha 1 *	=	180°
h	=	
s	=	
i <sup>1)</sup> *	=	4°25'58"
w	=	

**Lauf**

F <sup>1)</sup> *	=	10.14
Z <sup>1)</sup>	=	10.26

**Züge**

b	=	3.19
N	=	6
u	=	457.00
Q	=	81.92 mm <sup>2</sup>

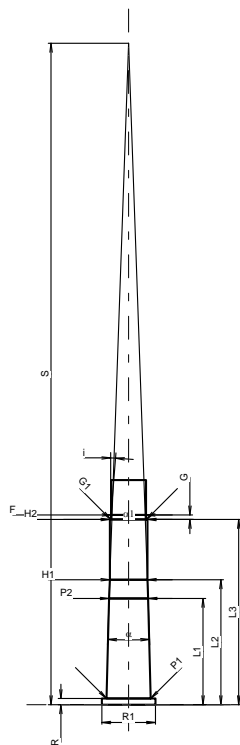

Maßstab 1:2.19

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
4) Verschlussabstand an Rand  
\* Grundmaße