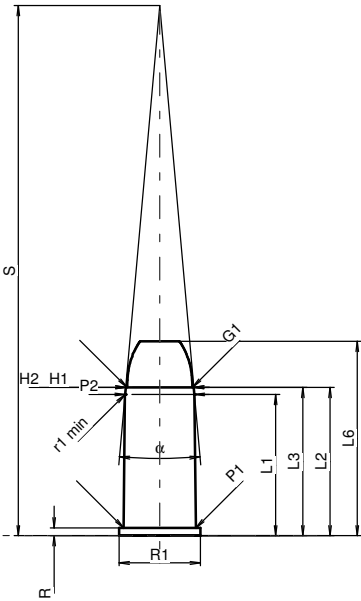
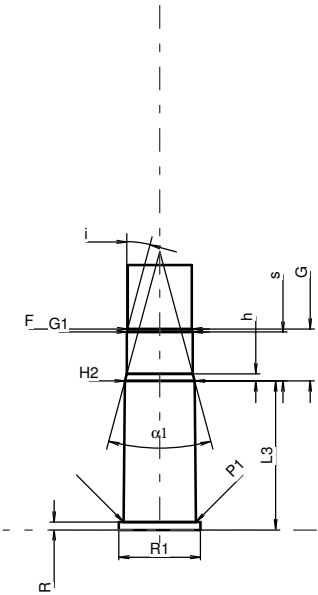


C.I.P.	56/50 Spencer Country of Origin: US	TAB.	II
		Date	04-05-18
		Revision	06-09-19
	CARTRIDGE MAXI Lengths L1 = 28.04 L2 = 29.44 L3 ¹⁾ = 29.44 L4 = L5 = L6 = 38.56 Case Head R ¹⁾ = 1.55 -0.25 R1 = 16.13 R3 = E = E1 = e min = δ = f = β = Powder Chamber P1 = 14.30 P2 * = 13.75 Junction Cone α * = 10°11' S * = 105.20 r1 min = 0.50 r2 = Collar H1 * = 13.50 H2 ¹⁾ = 13.50 Projectile G1 ¹⁾ = 13.00 G2 = F = L1+G ¹⁾ = 39.76 Pressures (Energies) Method Transducer Pmax = 2050 bar PK = 2358 bar PE = 2560 bar M = 17.50 EE = 1950 Joule Miscellaneous Dimensions Fe ¹⁾⁴⁾ = 0.15 delta L =	CHAMBER MINI Lengths L1 = L2 = L3 ¹⁾ = 29.55 Breech R = 1.55 R1 = 16.20 R2 = R3 = r = Powder Chamber E = P1 ¹⁾ = 14.32 P2 = Junction Cone α = S = r1 max = r2 = Collar H1 = H2 ¹⁾ = 13.77 Commencement of Rifling G1 ^{1)*} = 13.03 G ¹⁾ = 10.32 α1 * = 30° h = 1.38 s = 9.70 i ^{1)*} = 15° w = Barrel F ^{1)*} = 12.70 Z ¹⁾ = 12.95 Grooves b = 3.50 N = 6 u = 508.00 Q = 129.34 mm ²	
		Scale 1:1.5	Notes: 1) Check for safety reasons 4) Headspace on Rim * Basic dimensions
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1.			