


C.I.P.**8 x 56 R M30S**

TAB. II

Datum 88-01-30

Revision 06-08-02

Ursprungsland: AT

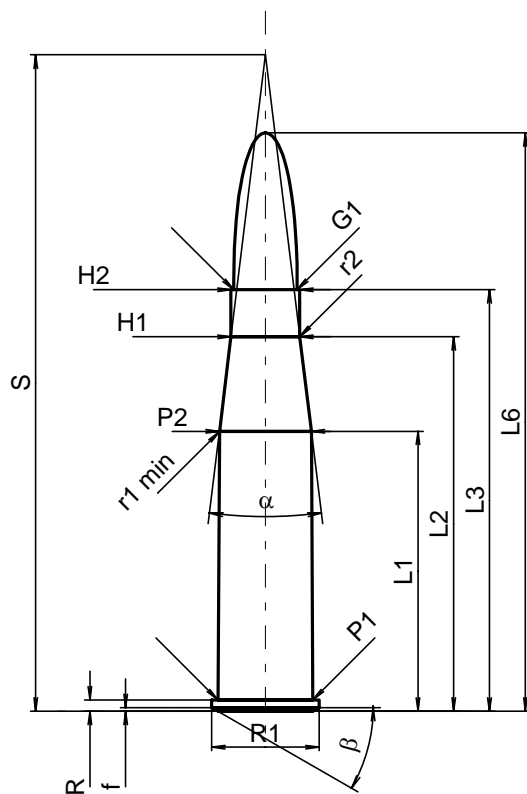**PATRONE MAXI****Längen**

L1*	=	37.03
L2*	=	49.53
L3 ¹⁾	=	55.75
L4	=	
L5	=	
L6	=	76.50

Hülsenboden

R ¹⁾	=	1.50	-0.25
R1	=	14.20	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.50	
beta	=	30°	

Pulverkammer

P1	=	12.55
P2*	=	12.15

Schulterkonus

alpha	=	13°54'41"
S	=	86.82
r1 min	=	10.00
r2	=	15.00

Hülsenhals

H1*	=	9.10
H2 ¹⁾	=	9.10

Geschoss

G1 ¹⁾	=	8.40
G2	=	
F	=	
L3+G ¹⁾	=	74.50

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	3550 bar
PK	=	4083 bar
PE	=	4440 bar
M	=	25.00
EE	=	3933 Joule

Verschiedene Daten

Fe ¹⁾	=	0.15
delta L	=	

PATRONELAGER MINI**Längen**

L1*	=	37.08
L2*	=	49.53
L3 ¹⁾	=	55.80

Stoßboden

R ¹⁾	=	1.50
R1	=	14.20
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	12.60
P2*	=	12.21

Schulterkonus

alpha	=	13°33'30"
S	=	88.43
r1 max	=	10.00
r2	=	10.00

Hülsenhals

H1*	=	9.25
H2 ¹⁾	=	9.20

Geschossübergang


G1 ^{1)*}	=	8.70
G ^{1)*}	=	18.75
alpha1	=	28°4'
h*	=	1.00
s	=	
i ¹⁾	=	1°12'37"
w	=	

Lauf

F ^{1)*}	=	7.95
Z ¹⁾	=	8.35

Züge

b	=	3.50
N	=	4
u	=	250.00
Q	=	52.53 mm ²

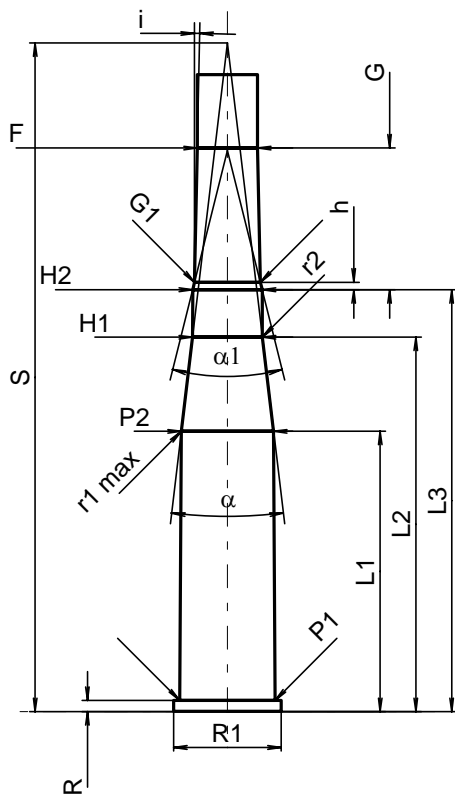

Maßstab 1:1

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße