


C.I.P.**8 x 65 R**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: DE

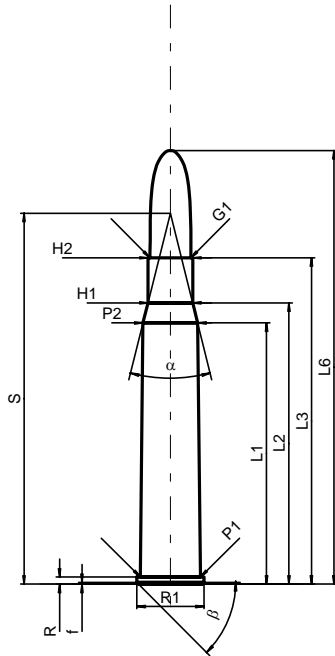**PATRONE MAXI****Längen**

L1*	=	51.80
L2*	=	55.79
L3 ¹⁾	=	64.70
L4	=	
L5	=	
L6	=	86.00

Hülsenboden

R ¹⁾	=	1.40	-0.25
R1	=	13.32	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Pulverkammer

P1	=	11.95
P2*	=	10.85

Schulterkonus

alpha	=	28°00'18"
S	=	73.55
r1 min	=	
r2	=	

Hülsenhals

H1*	=	8.86
H2 ¹⁾	=	8.86

Geschoss

G1 ¹⁾	=	8.09
G2	=	
F	=	
L3+G ¹⁾	=	98.70

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	3900 bar
PK	=	4485 bar
PE	=	4875 bar
M	=	25.00
EE	=	4410 Joule

Verschiedene Daten

Fe ¹⁾	=	0.10
delta L	=	

PATRONENLAGER MINI**Längen**

L1*	=	51.80
L2*	=	55.79
L3 ¹⁾	=	65.00

Stoßboden

R ¹⁾	=	1.40
R1	=	13.37
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	11.98
P2*	=	10.88

Schulterkonus

alpha	=	28°00'18"
S	=	73.61
r1 max	=	
r2	=	

Hülsenhals

H1*	=	8.89
H2 ¹⁾	=	8.88

Geschossübergang


G1 ^{1)*}	=	8.14
G ^{1)*}	=	34.00
alpha1	=	90°
h*	=	0.37
s	=	
i ¹⁾	=	0°17'23"
w	=	

Lauf

F ^{1)*}	=	7.80
Z ¹⁾	=	8.07

Züge

b	=	4.40
N	=	4
u	=	240.00
Q	=	50.30 mm ²

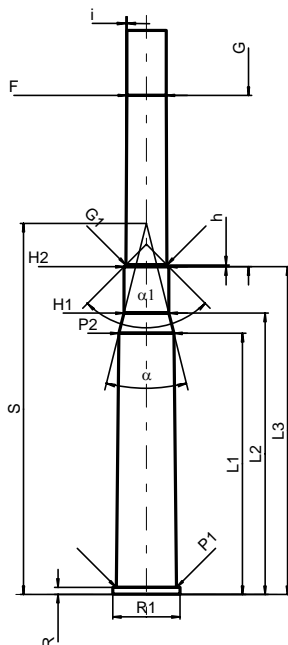

Maßstab 1:1.5

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße