


C.I.P.**8 x 65 RS**

TAB. II

Date 84-06-14

Pays d'origine: DE

Révision 02-05-15

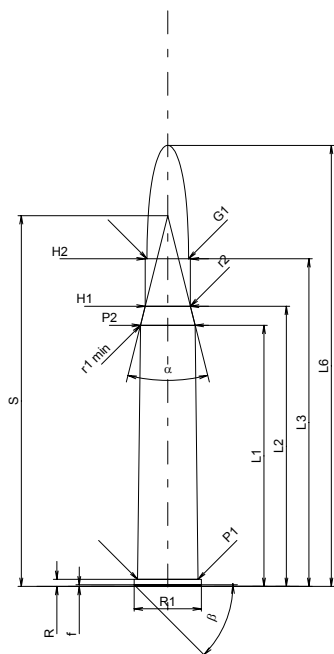**CARTOUCHE MAXI****Longueurs**

L1 *	=	51.80
L2 *	=	55.59
L3 ¹⁾	=	65.00
L4	=	
L5	=	
L6	=	87.50

Culot

R ¹⁾	=	1.40	-0.25
R1	=	13.32	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Chambre à poudre

P1	=	11.99
P2 *	=	10.85

Cône de raccordement

alpha	=	28°
S	=	73.56
r1 min	=	0.50
r2	=	0.50

Collet

H1 *	=	8.96
H2 ¹⁾	=	8.96

Projectile

G1 ¹⁾	=	8.22
G2	=	
F	=	
L3+G ¹⁾	=	98.00

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4050 bar
PK	=	4658 bar
PE	=	5060 bar
M	=	25.00
EE	=	4620 Joule

Autres indications

Fe ¹⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1 *	=	51.80
L2 *	=	55.59
L3 ¹⁾	=	65.30

Cuvette

R ¹⁾	=	1.40
R1	=	13.37
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	12.02
P2 *	=	10.88

Cône de raccordement

alpha	=	28°
S	=	73.62
r1 max	=	0.50
r2	=	0.50

Collet

H1 *	=	8.99
H2 ¹⁾	=	8.98

Prise de rayures


G1 ¹⁾ *	=	8.22
G ¹⁾ *	=	33.00
alpha1	=	180°
h	=	
s	=	
i ¹⁾	=	0°17'11"
w	=	

Canon

F ¹⁾ *	=	7.89
Z ¹⁾	=	8.20

Rayures

b	=	4.40
N	=	4
u	=	240.00
Q	=	51.78 mm ²

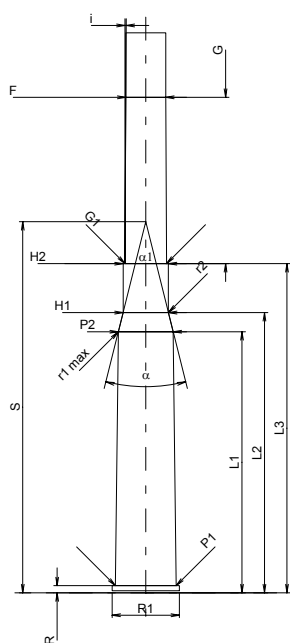

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base