

C.I.P.**300 Weath. Mag.**

TAB.

III

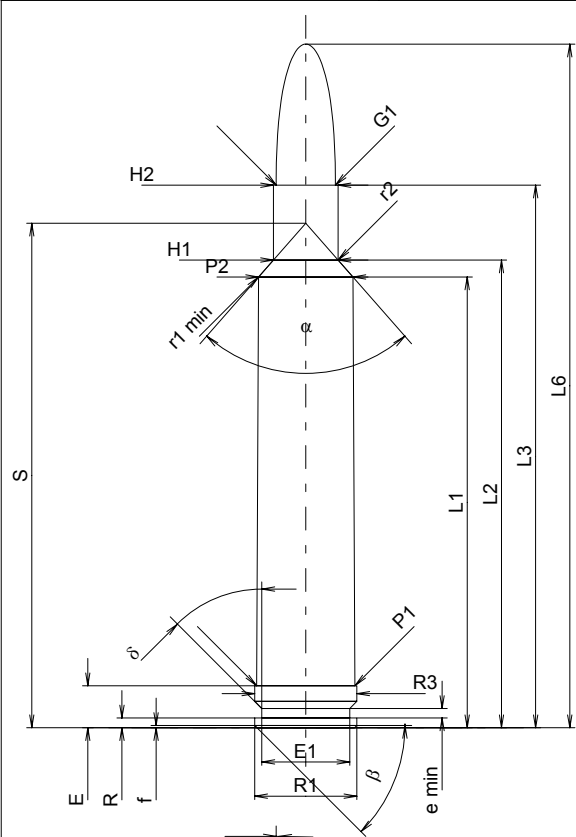
Date

84-06-14

Révision

02-05-15

Pays d'origine: US

**CARTOUCHE MAXI****Longueurs**

L1	=	59.62
L2	=	61.86
L3 ¹⁾	=	71.75
L4	=	
L5	=	
L6	=	90.42

Colot

R	=	1.30
R1	=	13.50
R3	=	13.50
E ¹⁾	=	5.56
E1	=	11.61
e min	=	1.24
delta	=	45°
f	=	0.30
beta	=	45°

Chambre à poudre

P1	=	13.00
P2*	=	12.49

Cône de raccordement

alpha*	=	82°38'20"
S*	=	66.73
r1 min	=	3.30
r2	=	4.62

Collet

H1*	=	8.56
H2 ¹⁾	=	8.56

Projectile

G1 ¹⁾	=	7.83
G2	=	
F	=	
L3+G ¹⁾	=	86.46

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4400 bar
PK	=	5060 bar
PE	=	5500 bar
M	=	25.00
EE	=	5880 Joule

Autres indications

Fe ¹⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	59.74
L2	=	61.92
L3 ¹⁾	=	72.24

Cuvette

R	=	
R1	=	13.56
R2	=	
R3	=	13.56
r	=	

Chambre à poudre

E ¹⁾	=	5.59
P1 ¹⁾	=	13.06
P2*	=	12.59

Cône de raccordement

alpha*	=	84°28'19"
S*	=	66.68
r1 max	=	3.05
r2	=	4.62

Collet

H1*	=	8.64
H2 ¹⁾	=	8.61

Prise de rayures

G1 ¹⁾ *	=	7.83
G ¹⁾	=	14.71
alpha1*	=	90°
h	=	0.39
s	=	9.17
i ¹⁾ *	=	1°01'59"
w	=	

Canon

F ¹⁾ *	=	7.63
Z ¹⁾	=	7.82

Rayures

b	=	3.00
N	=	6
u	=	254.00
Q	=	47.48 mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base