



C.I.P.**7,63 Mauser**

TAB. IV

Datum 84-06-14

Revision 06-09-19

Ursprungsland: DE

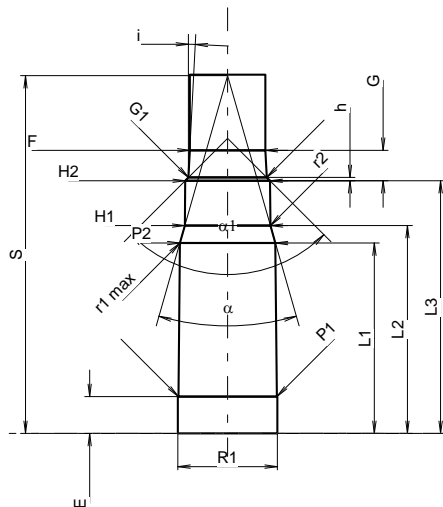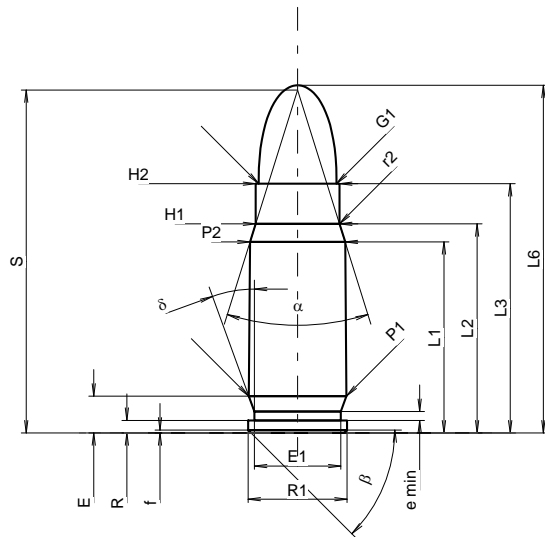

Maßstab 1.31:1

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

PATRONE MAXI**Längen**

| | | | |
|--------------------|---|-------|-------|
| L1 ¹⁾ * | = | 19.28 | -0.20 |
| L2 ¹⁾ * | = | 21.10 | -0.20 |
| L3 ¹⁾ | = | 25.15 | |
| L4 | = | | |
| L5 | = | | |
| L6 | = | 35.08 | |

Hülsenboden

| | | | |
|-------|---|------|--|
| R | = | 1.27 | |
| R1 | = | 9.98 | |
| R3 | = | | |
| E | = | 3.72 | |
| E1 | = | 8.73 | |
| e min | = | 0.90 | |
| delta | = | 20° | |
| f | = | 0.30 | |
| beta | = | 45° | |

Pulverkammer

| | | | |
|--------------------|---|------|-------|
| P1 | = | 9.86 | |
| P2 ¹⁾ * | = | 9.60 | -0.20 |

Schulterkonus

| | | | |
|--------|---|-----------|--|
| alpha | = | 34°46'47" | |
| S | = | 34.61 | |
| r1 min | = | | |
| r2 | = | 2.50 | |

Hülsenhals

| | | | |
|------------------|---|------|--|
| H1 * | = | 8.46 | |
| H2 ¹⁾ | = | 8.46 | |

Geschoss

| | | | |
|--------------------|---|-------|--|
| G1 ¹⁾ | = | 7.86 | |
| G2 | = | | |
| F | = | | |
| L3+G ¹⁾ | = | 28.22 | |

Drücke (Energien)**Mech. elektr. Wandler**

| | | | |
|------|---|----------|--|
| Pmax | = | 2250 bar | |
| PK | = | 2588 bar | |
| PE | = | 2925 bar | |
| M | = | 17.50 | |

Verschiedene Daten

| | | | |
|--------------------|---|------|--|
| Fe ¹⁾³⁾ | = | 0.20 | |
| delta L | = | | |

PATRONENLAGER MINI**Längen**

| | | | |
|------------------|---|-------|--|
| L1 * | = | 19.21 | |
| L2 * | = | 20.98 | |
| L3 ¹⁾ | = | 25.50 | |

Stoßboden

| | | | |
|----|---|-------|--|
| R | = | 1.27 | |
| R1 | = | 10.03 | |
| R2 | = | | |
| R3 | = | | |
| r | = | | |

Pulverkammer

| | | | |
|------------------|---|------|--|
| E | = | 3.72 | |
| P1 ¹⁾ | = | 9.93 | |
| P2 * | = | 9.64 | |

Schulterkonus

| | | | |
|---------------------|---|-----------|--|
| alpha ¹⁾ | = | 31°50'53" | |
| S | = | 36.10 | |
| r1 max | = | 2.50 | |
| r2 | = | 2.50 | |

Hülsenhals

| | | | |
|------------------|---|------|--|
| H1 * | = | 8.63 | |
| H2 ¹⁾ | = | 8.55 | |

Geschossübergang

| | | | |
|--------------------|---|----------|--|
| G1 ¹⁾ * | = | 7.90 | |
| G ¹⁾ * | = | 3.07 | |
| alpha 1 | = | 90° | |
| h * | = | 0.33 | |
| s | = | | |
| i ¹⁾ | = | 2°55'30" | |
| w | = | | |

Lauf

| | | | |
|-------------------|---|------|--|
| F ¹⁾ * | = | 7.62 | |
| Z ¹⁾ | = | 7.85 | |

Züge

| | | | |
|---|---|--------|-----------------|
| b | = | 2.65 | |
| N | = | 6 | |
| u | = | 250.00 | |
| Q | = | 47.47 | mm ² |

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
3) Verschlussabstand an Schulter
* Grundmaße