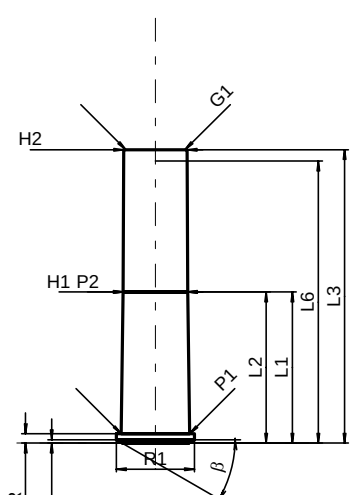
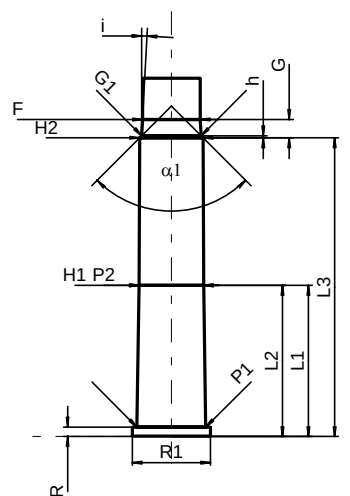


C.I.P.	7,62 Nagant Ursprungsland: BE	TAB. IV
		Datum 84-06-14
		Revision 00-06-07
	PATRONE MAXI Längen L1* = 20.00 L2* = 20.00 L3 ¹⁾ = 38.80 L4 = L5 = L6 = 37.30 Hülsenboden R ¹⁾ = 1.25 -0.25 R1 = 10.30 R3 = E = E1 = e min = δ = f = 0.44 β = 30° Pulverkammer P1 = 9.06 P2* = 8.51 Schulterkonus α = S = r1 min = r2 = Hülsenhals H1* = 8.51 H2 ¹⁾ = 8.42 Geschoss G1 ¹⁾ = 7.82 G2 = F = L3+G ¹⁾ = 41.23 Drücke (Energien) Mech. elektr. Wandler Pmax = 770 bar PK = 886 bar PE = 1001 bar M = 17.50 Verschiedene Daten Fe ¹⁾ = 0.25 delta L =	PATRONE NLAGER MINI Längen L1* = 20.00 L2* = 20.00 L3 ¹⁾ = 39.50 Stoßboden R ¹⁾ = 1.25 R1 = 10.35 R2 = R3 = r = Pulverkammer E = P1 ¹⁾ = 9.10 P2* = 8.53 Schulterkonus α = S = r1 max = r2 = Hülsenhals H1* = 8.53 H2 ¹⁾ = 8.41 Geschossübergang G1 ^{1)*} = 7.85 G ^{1)*} = 2.43 α1 = 90° h* = 0.28 s = j ¹⁾ = 3°03'42" w = Lauf F ^{1)*} = 7.62 Z ¹⁾ = 7.82 Züge b = 3.81 N = 4 u = 240.00 Q = 47.99 mm ²
		
Maßstab 1:1		
Maße in << mm >> Maße und Toleranzen für Messläufe siehe Anhang CR 1.	Bemerkungen: 1) Kontrolle aus Sicherheitsgründen * Grundmaße	