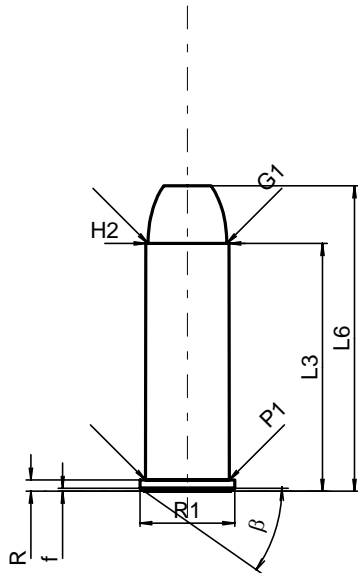


**C.I.P.****41 Rem. Mag.****TAB. IV****Datum 86-12-14****Revision 00-06-07**

Ursprungsland: US

**PATRONE MAXI****Längen**

L1	=	
L2	=	
L3 <sup>1)</sup>	=	32.77
L4	=	
L5	=	
L6	=	40.39

**Hülsenboden**

R <sup>1)</sup>	=	1.50	-0.25
R1	=	12.50	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.38	
beta	=	35°	

**Pulverkammer**

P1	=	11.05
P2	=	

**Schulterkonus**

alpha	=	
S	=	
r1 min	=	
r2	=	

**Hülsenhals**

H1	=	
H2 <sup>1)</sup>	=	11.02

**Geschoss**

G1 <sup>1)</sup>	=	10.41
G2	=	
F	=	
L3+G <sup>1)</sup>	=	46.60

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	3000 bar
PK	=	3450 bar
PE	=	3900 bar
M	=	17.50

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.25
delta L	=	

**PATRONENLAGER MINI****Längen**

L1	=	
L2	=	
L3 <sup>1)</sup>	=	33.32

**Stoßboden**

R <sup>1)</sup>	=	1.52
R1	=	12.62
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	11.10
P2	=	

**Schulterkonus**

alpha	=	
S	=	
r1 max	=	
r2	=	

**Hülsenhals**

H1	=	
H2 <sup>1)</sup>	=	11.05

**Geschossübergang**


G1 <sup>1)*</sup>	=	10.44
G <sup>1)</sup>	=	13.83
alpha <sup>*</sup>	=	25°
h	=	1.38
s	=	12.06
i <sup>1)*</sup>	=	5°
w	=	

**Lauf**

F <sup>1)*</sup>	=	10.13
Z <sup>1)</sup>	=	10.39

**Züge**

b	=	2.68
N	=	6
u	=	476.30
Q	=	82.71 mm <sup>2</sup>

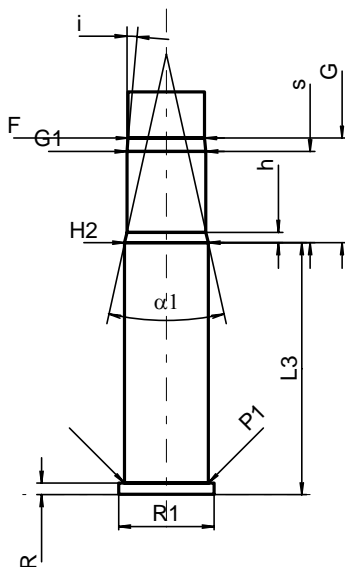

Maßstab 1:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße