

**C.I.P.****22 Win. Mag. R.F.**


TAB. V

Datum 84-06-14

Revision 08-09-23

Ursprungsland: US

Alternative Namen: 22 Win.Mag.,22 WMR, 22 Magnum

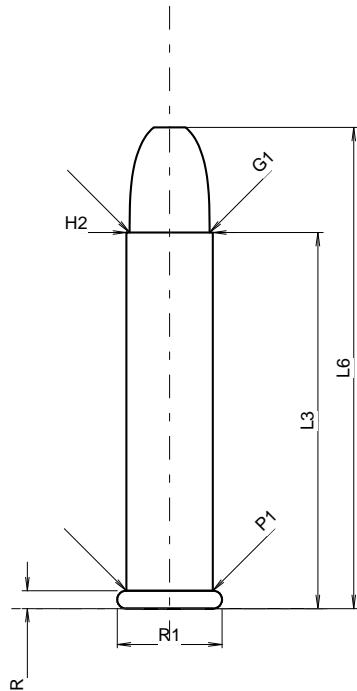**PATRONE MAXI****Längen**

L1	=	
L2	=	
L3 <sup>1)</sup>	=	26.80
L4	=	
L5	=	
L6	=	34.29

**Hülsenboden**

R <sup>1)</sup>	=	1.27	-0.18
R1	=	7.47	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=		
β	=		

**Pulverkammer**

P1	=	6.15
P2	=	

**Schulterkonus**

α	=	
S	=	
r1 min	=	
r2	=	

**Hülsenhals**

H1	=	
H2 <sup>1)</sup>	=	6.15

**Geschoss**

G1 <sup>1)</sup>	=	5.70
G2	=	
F	=	
L3+G <sup>1)</sup>	=	31.39

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	1600 bar
PK	=	1840 bar
PE	=	2080 bar
M	=	17.50

**Verschiedene Daten**

Fe <sup>1)4)</sup>	=	0.20
delta L	=	

**PATRONENLAGER MINI****Längen**

L1	=	
L2	=	
L3 <sup>1)</sup>	=	27.18

**Stoßboden**

R <sup>1)</sup>	=	1.27
R1	=	7.67
R2	=	
R3	=	
r	=	0.25

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	6.20
P2	=	

**Schulterkonus**

α	=	
S	=	
r1 max	=	
r2	=	

**Hülsenhals**

H1	=	
H2 <sup>1)</sup>	=	6.17

**Geschossübergang**


G1 *	=	5.76
G	=	4.59
α1 *	=	30°
h	=	0.77
s	=	
i *	=	1°30'
w	=	

**Lauf**

F <sup>1)</sup> *	=	5.56
Z <sup>1)</sup>	=	5.69

**Züge**

b	=	1.88
N	=	6
u	=	406.00
Q	=	25.03 mm <sup>2</sup>

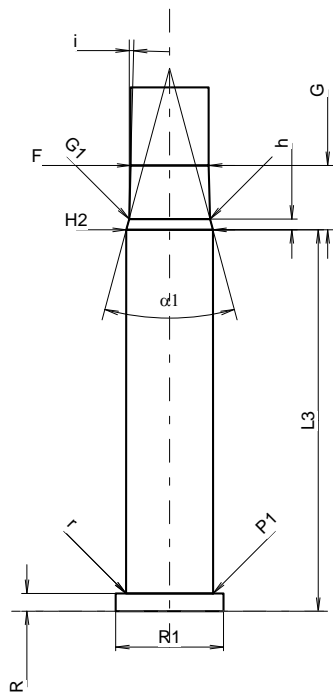

Maßstab 1.86:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 2.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
4) Verschlussabstand an Rand  
\* Grundmaße