

**C.I.P.****22 NC (5,5/16)**

TAB.

VI

Datum

84-06-14

Revision

96-06-06

Ursprungsland: US

**PATRONE MAXI****Längen**

L1	=	9.04
L2	=	9.85
L3 <sup>1)</sup>	=	15.60
L4	=	
L5	=	
L6	=	15.30

**Hülsenboden**

R	=	1.12
R1	=	7.06
R3	=	
E	=	
E1	=	
e min	=	
δ	=	
f	=	
β	=	

**Pulverkammer**

P1	=	5.74
P2*	=	5.74

**Schulterkonus**

α*	=	17°32'44"
S*	=	27.64
r1 min	=	
r2	=	

**Hülsenhals**

H1*	=	5.49
H2 <sup>1)</sup>	=	5.49

**Volumen [cm³]**

VC	=	0.39
Va 1	=	0.16
Va 2	=	0.80

**Drücke (Energien)****Mechan. elektr. Wandler [Va1]**

Pmax	=	2800 bar
PK	=	3220 bar
PE	=	3640 bar

**Mechan. elektr. Wandler [Va2]**

Pmax	=	1300 bar
PK	=	1495 bar
PE	=	1690 bar
M	=	

**Verschiedene Daten**

Fe	=	
delta L	=	

**PATRONENLAGER MINI****Längen**

L1	=	
L2	=	
L3 <sup>1)</sup>	=	16.00

**Stossboden**

R <sup>1)</sup>	=	1.10
R1	=	7.10
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1	=	5.80
P2	=	

**Schulterkonus**

α	=	
S	=	
r1 max	=	
r2	=	

**Hülsenhals**

H1	=	
H2	=	5.76

**Übergang**



G1*	=	6.00
G	=	
α1*	=	180°
h	=	
s	=	
i	=	
w	=	

**Lauf**

F*	=	6.00
Z	=	6.00

**Volumen [cm³]**

V(ET)	=	0.45
V(T)	=	

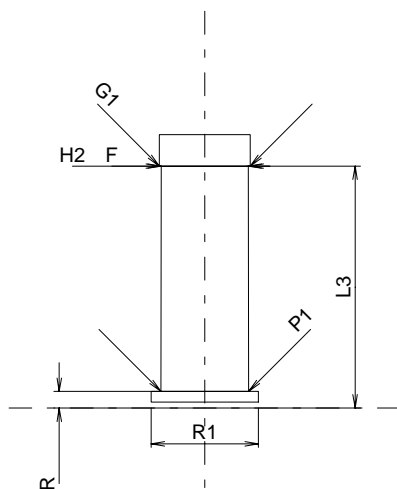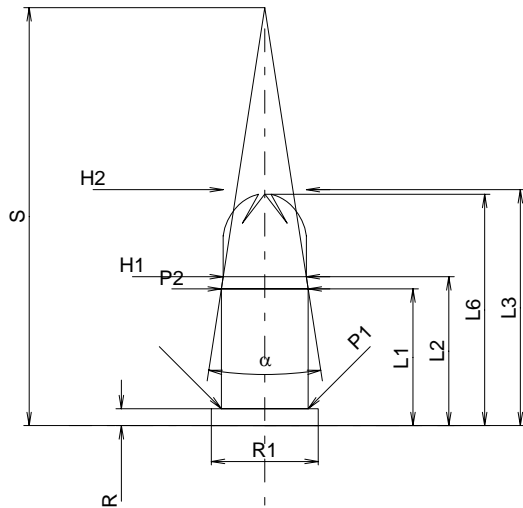

Maßstab 2:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 3.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße