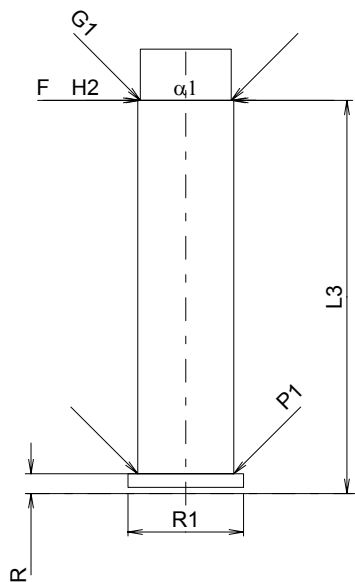
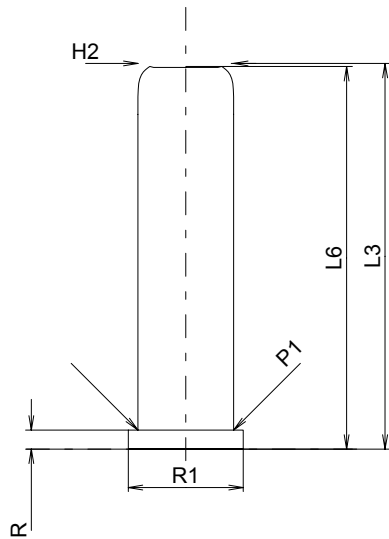


**C.I.P.****6,3/25**

Country of Origin: GB/IT

|                 |                 |
|-----------------|-----------------|
| <b>TAB.</b>     | <b>VI</b>       |
| <b>Date</b>     | <b>84-06-14</b> |
| <b>Revision</b> | <b>90-06-13</b> |

**CARTRIDGE MAXI****Lengths**

|                  |   |       |
|------------------|---|-------|
| L1               | = |       |
| L2               | = |       |
| L3 <sup>1)</sup> | = | 25.50 |
| L4               | = |       |
| L5               | = |       |
| L6               | = | 25.30 |

**Case Head**

|       |   |      |
|-------|---|------|
| R     | = | 1.25 |
| R1    | = | 7.60 |
| R3    | = |      |
| E     | = |      |
| E1    | = |      |
| e min | = |      |
| δ     | = |      |
| f     | = |      |
| β     | = |      |

**Powder Chamber**

|    |   |      |
|----|---|------|
| P1 | = | 6.32 |
| P2 | = |      |

**Junction Cone**

|        |   |  |
|--------|---|--|
| α      | = |  |
| S      | = |  |
| r1 min | = |  |
| r2     | = |  |

**Collar**

|                  |   |      |
|------------------|---|------|
| H1               | = |      |
| H2 <sup>1)</sup> | = | 6.32 |

**Volumes [cm<sup>3</sup>]**

|      |   |      |
|------|---|------|
| VC   | = | 0.82 |
| Va 1 | = | 0.16 |
| Va 2 | = | 0.80 |

**Pressures (Energies)****Miscellaneous Dimensions**

|         |   |  |
|---------|---|--|
| Fe      | = |  |
| delta L | = |  |

**CHAMBER MINI****Lengths**

|                  |   |       |
|------------------|---|-------|
| L1               | = |       |
| L2               | = |       |
| L3 <sup>1)</sup> | = | 26.00 |

**Breech**

|                 |   |      |
|-----------------|---|------|
| R <sup>1)</sup> | = | 1.30 |
| R1              | = | 7.65 |
| R2              | = |      |
| R3              | = |      |
| r               | = |      |

**Powder Chamber**

|    |   |      |
|----|---|------|
| E  | = |      |
| P1 | = | 6.36 |
| P2 | = |      |

**Junction Cone**

|        |   |  |
|--------|---|--|
| α      | = |  |
| S      | = |  |
| r1 max | = |  |
| r2     | = |  |

**Collar**

|    |   |      |
|----|---|------|
| H1 | = |      |
| H2 | = | 6.35 |

**Commencement of Rifling**

|                 |   |      |
|-----------------|---|------|
| G1 <sup>*</sup> | = | 6.00 |
| G               | = |      |
| α1              | = | 180° |
| h               | = |      |
| s               | = |      |
| i               | = |      |
| w               | = |      |

**Barrel**

|                |   |      |
|----------------|---|------|
| F <sup>*</sup> | = | 6.00 |
| Z              | = | 6.00 |

**Volumes [cm<sup>3</sup>]**

|       |   |      |
|-------|---|------|
| V(ET) | = | 0.84 |
| V(T)  | = |      |

Scale 2:1

Dimensions in << mm >>  
Dimensions and Tolerances for Proof Barrels  
see Appendix CR 3.

Notes: 1) Check for safety reasons  
\* Basic dimensions