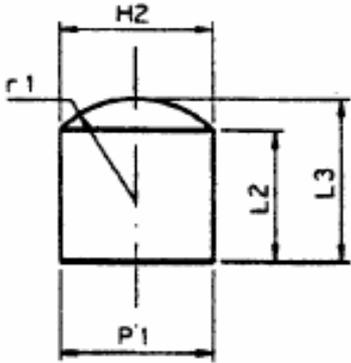
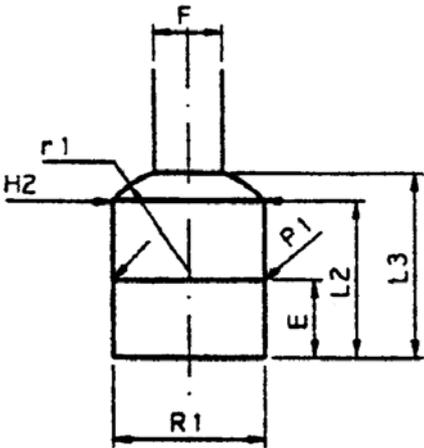


C.I.P.	10 x 11 Schermer Country of Origin: DE	TAB.	VI
		Date	84-06-09
		Revision	96-02-06
	<p style="text-align: center;"><b>CARTRIDGE MAXI</b></p> <p><b>Lengths</b></p> L1 = L2* = 8.70 L3 <sup>1)</sup> = 10.80 L4 = L5 = L6 = <p><b>Case Head</b></p> R = R1 = R3 = E = E1 = e min = δ = f = β = <p><b>Powder Chamber</b></p> P1 = 10.00 P2 = <p><b>Junction Cone</b></p> α = S = r1 min = r2 = <p><b>Collar</b></p> H1 = H2 <sup>1)</sup> = 10.00 <p><b>Volumes [cm<sup>3</sup>]</b></p> VC = 0.77 Va 1 = 0.40 Va 2 = <p><b>Pressures (Energies)</b></p> <p><b>Energy (Va 1)</b></p> E <sub>max</sub> = 1200 Joule E <sub>K</sub> = 1284 Joule E <sub>E</sub> = 1760 Joule <p><b>Miscellaneous Dimensions</b></p> Fe = delta L =	<p style="text-align: center;"><b>CHAMBER MINI</b></p> <p><b>Lengths</b></p> L1 = L2* = 10.20 L3 <sup>1)</sup> = 12.00 <p><b>Breech</b></p> R = R1 = 10.00 R2 = R3 = r = <p><b>Powder Chamber</b></p> E = 5.00 P1 = 10.00 P2 = <p><b>Junction Cone</b></p> α = S = r1 max = 7.00 r2 = <p><b>Collar</b></p> H1 = H2 = 10.00 <p><b>Commencement of Rifling</b></p> G1 = G = α1 = h = s = i = w = <p><b>Barrel</b></p> F* = 4.50 Z = <p><b>Volumes [cm<sup>3</sup>]</b></p> V(ET) = 0.88 V(T) =	
			
Scale 2 : 1			
Dimensions in « mm » Dimensions and Tolerances for Proof Barrels see Appendix CR 3.		Notes: 1) Check for safety reasons * Basic dimensions	