

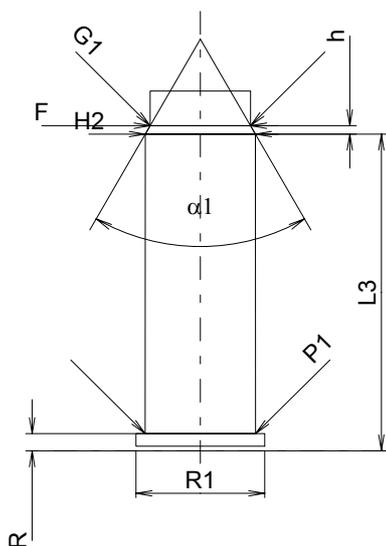
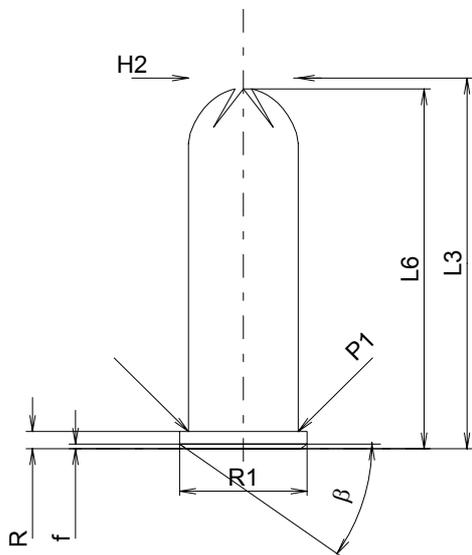
**C.I.P.****357 Kraken**

TAB. VI

Date 99-11-01

Revision 00-06-07

Country of Origin: CZ

**CARTRIDGE MAXI****Lengths**

L1	=	
L2	=	
L3 <sup>1)</sup>	=	32.77
L4	=	
L5	=	
L6	=	31.80

**Case Head**

R	=	1.52
R1	=	11.18
R3	=	
E	=	
E1	=	
e min	=	
$\delta$	=	
f	=	0.40
$\beta$	=	35°

**Powder Chamber**

P1	=	9.63
P2	=	

**Junction Cone**

$\alpha$	=	
S	=	
r1 min	=	
r2	=	

**Collar**

H1	=	
H2 <sup>1)</sup>	=	9.63

**Volumes [cm<sup>3</sup>]**

VC	=	
Va 1	=	0.40
Va 2	=	

**Pressures (Energies)****Method Transducer [Va1]**

Pmax	=	3000 bar
PK	=	3450 bar
PE	=	3900 bar
M	=	

**Miscellaneous Dimensions**

Fe	=	
delta L	=	

**CHAMBER MINI****Lengths**

L1	=	
L2	=	
L3 <sup>1)</sup>	=	28.00

**Breech**

R <sup>1)</sup>	=	1.52
R1	=	11.28
R2	=	
R3	=	
r	=	

**Powder Chamber**

E	=	
P1	=	9.68
P2	=	

**Junction Cone**

$\alpha$	=	
S	=	
r1 max	=	
r2	=	

**Collar**

H1	=	
H2	=	9.65

**Commencement of Rifling**

G1 <sup>*</sup>	=	8.80
G	=	
$\alpha_1$	=	59°44'23"
h <sup>*</sup>	=	0.74
s	=	
i	=	
w	=	

**Barrel**

F <sup>*</sup>	=	8.80
Z	=	8.80

**Volumes [cm<sup>3</sup>]**

V(ET)	=	
V(T)	=	

Scale 1.5:1

Dimensions in << mm >>  
Dimensions and Tolerances for Proof Barrels  
see Appendix CR 3.

Notes: 1) Check for safety reasons  
\* Basic dimensions