


C.I.P.**380 SB (9 x 23)**

TAB. VI

Date 84-06-14

Revision 90-06-13

Country of Origin: IT

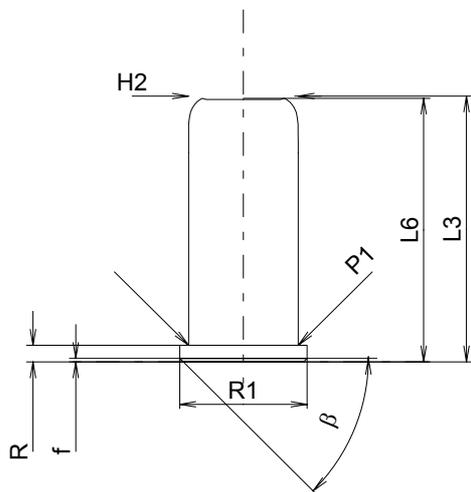**CARTRIDGE MAXI****Lengths**

L1	=	
L2	=	
L3 ¹⁾	=	23.50
L4	=	
L5	=	
L6	=	23.30

Case Head

R	=	1.47
R1	=	11.17
R3	=	
E	=	
E1	=	
e min	=	
delta	=	
f	=	0.30
beta	=	45°

Powder Chamber

P1	=	9.62
P2	=	

Junction Cone

alpha	=	
S	=	
r1 min	=	
r2	=	

Collar

H1	=	
H2 ¹⁾	=	9.62

Volumes [cm³]

VC	=	1.75
Va 1	=	0.40
Va 2	=	

Pressures (Energies)**Miscellaneous Dimensions**

Fe	=	
delta L	=	

CHAMBER MINI**Lengths**

L1	=	
L2	=	
L3 ¹⁾	=	24.00

Breech

R ¹⁾	=	1.50
R1	=	11.25
R2	=	
R3	=	
r	=	

Powder Chamber

E	=	
P1	=	9.67
P2	=	

Junction Cone

alpha	=	
S	=	
r1 max	=	
r2	=	

Collar

H1	=	
H2	=	9.65

Commencement of Rifling


G1*	=	9.00
G	=	
alpha 1	=	180°
h	=	
s	=	
i	=	
w	=	

Barrel

F*	=	9.00
Z	=	9.00

Volumes [cm³]

V(ET)	=	1.80
V(T)	=	

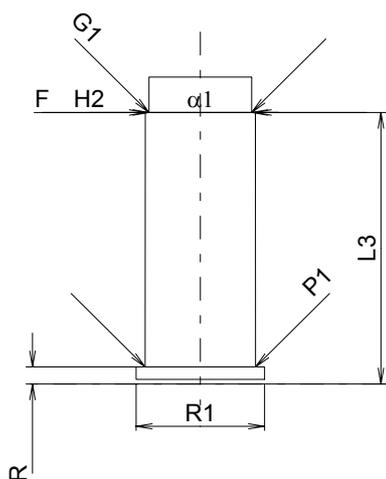

Scale 1.5:1

Dimensions in << mm >>
Dimensions and Tolerances for Proof Barrels
see Appendix CR 3.

Notes: 1) Check for safety reasons
* Basic dimensions