


C.I.P.	Cal. 410	TAB.	VII
		Date	84-06-14
		Revision	16-05-18


Alternative Names: 36

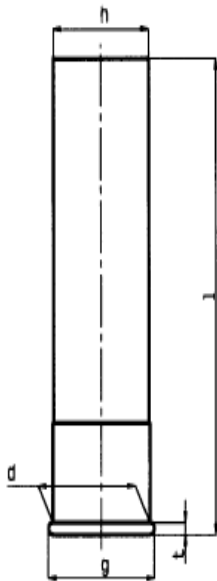

CARTRIDGE MAXIMALE

Dimens. Value Toler.

d ¹⁾	=	12.00	- 0.11	
g	=	13.60	- 0.40	
t ¹⁾	=	1.55	- 0.35	Marking
h	=	11.75	- 0.38	
l	=	50.70	- 2.50	410/50,7
l	=	63.50	- 2.50	410/63.5
l	=	65.00	- 2.50	410/65
l	=	69.80	- 2.50	410/70
l	=	72.80	- 2.50	410/73
l	=	76.00	- 2.50	410/76

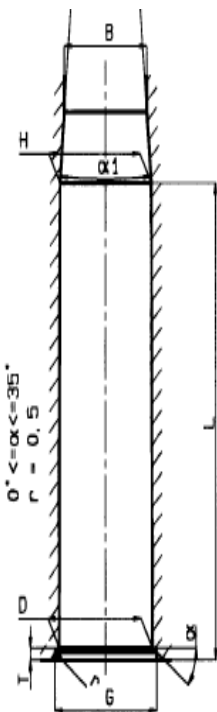

CHAMBER MINIMALE

Dimens. Value Toler.

D ¹⁾	=	12.05	+ 0.10	
G	=	13.70	+ 0.10	
T ¹⁾	=	1.55	+ 0.10	
H ¹⁾	=	11.80	+ 0.10	Marking
B ¹⁾	=	10.20	+ 0.50	Pressure transducer
α ¹⁾	=	10°30'	max	Pmax PK PE M
L ¹⁾	=	50.80	+ 2.00	830 950 1040 12.5
L ¹⁾	=	63.60	+ 2.00	830 950 1040 17
L ¹⁾	=	65.10	+ 2.00	830 950 1040 17
L ¹⁾	=	69.90	+ 2.00	830 950 1040 17
L ¹⁾	=	73.00	+ 2.00	1050 1200 1320 17
L ¹⁾	=	76.20	+ 2.00	1050 1200 1320 17

Headspace

Fe	=	0.10	Proof Barrel with bascule automatic
Fe ¹⁾	=	0.20	
Fe ¹⁾	=	0.35	

Scale 1:1

Dimensions in « mm »
Dimensions and tolerances for Proof Barrels:
See Appendix CR 4.

Notes : 1) Check for safety reasons