



<b>C.I.P.</b>	<b>Cal. 20</b>	<b>TAB. VII</b>
		<b>Date 84-06-14</b>
		<b>Revision 20-11-10</b>

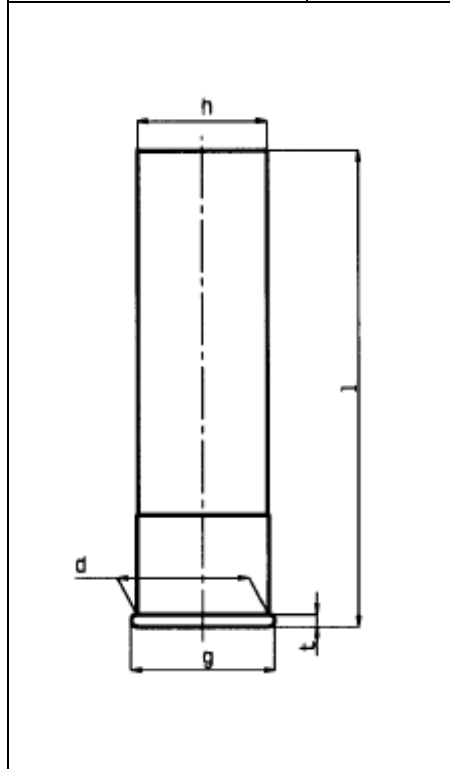

**CARTIDGE MAXIMALE**

Dimens. Valeur Toler.

d <sup>1)</sup>	= 17.70 - 0.22	
g	= 19.40 - 0.40	
t <sup>1)</sup>	= 1.55 - 0.35	Marking
h	= 17.35 - 0.49	
l	= 58.00 - 2.50	20/58
l	= 65.00 - 2.50	20/65
l	= 67.50 - 2.50	20/67
l	= 69.80 - 2.50	20/70
l	= 76.00 - 2.50	20/76
l	= 88,70 - 2,50	20/89

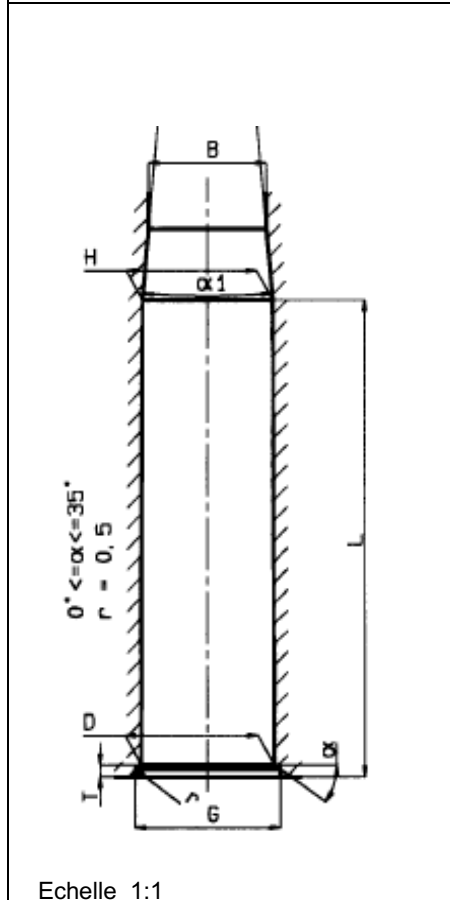

**CHAMBER MINIMALE**

Dimens. Valeur Toler.

D <sup>1)</sup>	= 17.75 + 0.10			
G	= 19.50 + 0.10			
T <sup>1)</sup>	= 1.55 + 0.10	Marking	Pressure transducer	
H <sup>1)</sup>	= 17.40 + 0.10		Pmax	PK PE M
B <sup>1)</sup>	= 15.70 + 0.50		bar	
α <sup>1)</sup>	= 10°30' max			
L <sup>1)</sup>	= 58.10 + 2.00	20/58	830	950 1040 25/30
L <sup>1)</sup>	= 65.10 + 2.00	20/65	830	950 1040 25/30
L <sup>1)</sup>	= 67.60 + 2.00	20/67	830	950 1040 25/30
L <sup>1)</sup>	= 69.90 + 2.00	20/70	830	950 1040 25/30
L <sup>1)</sup>	= 76.20 + 2.00	20/76	1050	1200 1320 25/30
L <sup>1)</sup>	= 88,90 + 2,00	20/89	1050	1200 1320 25/30

Headspace

Fe	= 0.10	proof barrel
Fe <sup>1)</sup>	= 0.20	with bascule
Fe <sup>1)</sup>	= 0.35	automatic

Echelle 1:1

Dimensions in « mm »  
Dimensions et tolerances for proof barrels :

See Appendix CR4

Notes : 1) Check for safety reasons