



C.I.P.	Cal. 28	TAB. VII
		Date 84-06-14
		Revision 17-05-17

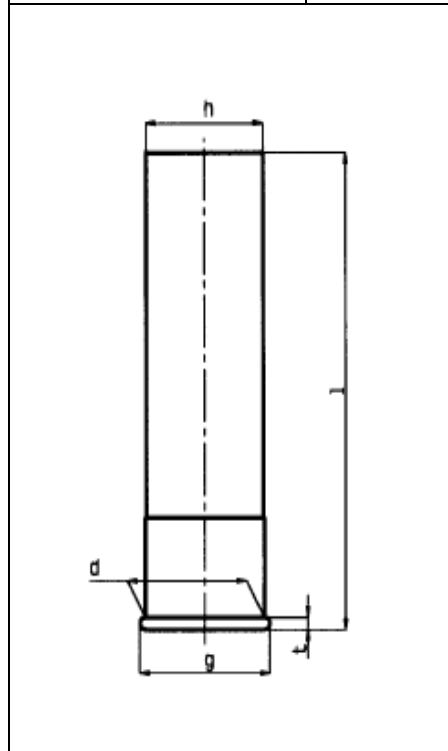

CARTRIDGE MAXIMALE

Dimens.	Value	Toler.	
d ¹⁾	= 15.85	- 0.18	
g	= 17.40	- 0.38	
t ¹⁾	= 1.55	- 0.35	Marking
h	= 15.55	- 0.49	
l	= 58.50	- 2.50	28/58,5
l	= 63.50	- 2.50	28/63,5
l	= 65.00	- 2.50	28/65
l	= 69.80	- 2.50	28/70
l	= 76.00	- 2.50	28/76

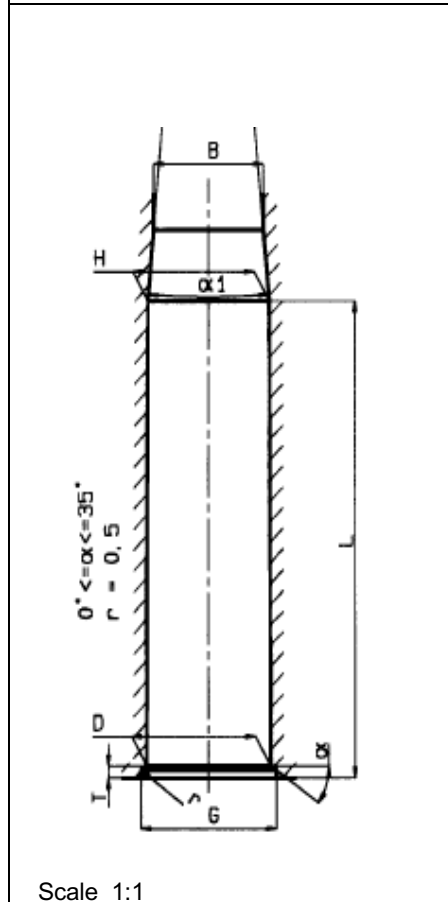

CHAMBER MINIMALE

Dimens.	Value	Toler.			
D ¹⁾	= 15.90	+ 0.10			
G	= 17.50	+ 0.10			
T ¹⁾	= 1.55	+ 0.10			
H ¹⁾	= 15.60	+ 0.10	Marking	Pressure transducer	
B ¹⁾	= 13.80	+ 0.50		Pmax	PK PE M
alpha 1 ¹⁾	= 10°30'	max		bar	
L ¹⁾	= 58.60	+ 2.00	28/58,5	830	950 1040 17
L ¹⁾	= 63.60	+ 2.00	28/63,5	830	950 1040 17
L ¹⁾	= 65.10	+ 2.00	28/65	830	950 1040 17
L ¹⁾	= 69.90	+ 2.00	28/70	830	950 1040 17
L ¹⁾	= 76.20	+ 2.00	28/76	1050	1200 1320 17

Headspace

Fe	= 0.10	Proof Barrel
Fe ¹⁾	= 0.20	with bascule
Fe ¹⁾	= 0.35	automatic

Scale 1:1

Dimensions in « mm »
Dimensions and tolerances for Proof Barrels:
See Appendix CR 4.

Notes : 1) Check for safety reasons