



C.I.P.	Cal. 32	TAB. VII
		Date 84-06-14
		Revision 06-09-19

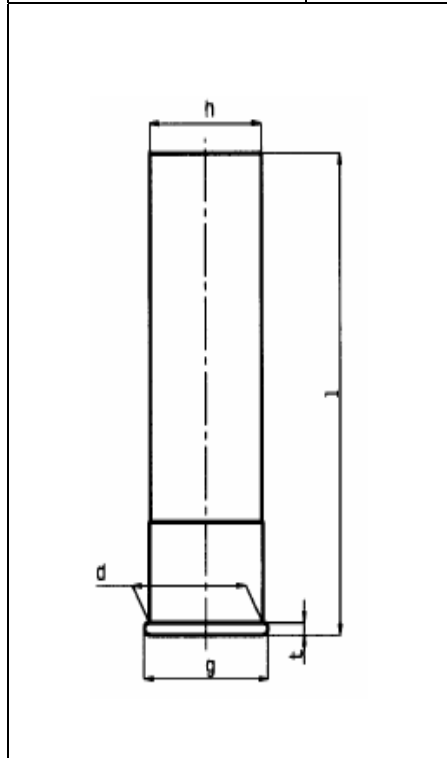

CARTRIDGE MAXIMALE

Dimens. Value Toler.

d ¹⁾	= 14.55	- 0.15	
g	= 16.10	- 0.40	
t ¹⁾	= 1.55	- 0.35	Marking
h	= 14.25	- 0.35	
l	= 50.70	- 2.50	32/50,7
l	= 60.00	- 2.50	32/60
l	= 63.50	- 2.50	32/63.5
l	= 65.00	- 2.50	32/65
l	= 69.80	- 2.50	32/70

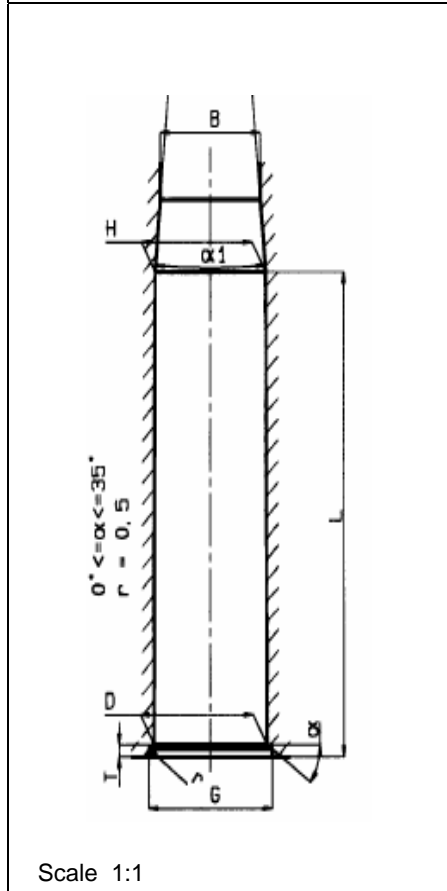

CHAMBER MINIMALE

Dimens. Value Toler.

D ¹⁾	= 14.60	+ 0.10				
G	= 16.20	+ 0.10				
T ¹⁾	= 1.55	+ 0.10	Marking			
H ¹⁾	= 14.30	+ 0.10				
B ¹⁾	= 12.70	+ 0.50				
α1 ¹⁾	= 10°30'	max				
L ¹⁾	= 50.80	- 2.50	32/50,7	830	950	1040
L ¹⁾	= 60.10	+ 2.00	32/60	830	950	1040
L ¹⁾	= 63.60	+ 2.00	32/63.5	830	950	1040
L ¹⁾	= 65.10	+ 2.00	32/65	830	950	1040
L ¹⁾	= 69.90	+ 2.00	32/70	830	950	1040

Pressure transducer
Pmax PK PE M
bar

Headspace

Fe	= 0.10	Proof Barrel with bascule automatic
Fe ¹⁾	= 0.20	
Fe ¹⁾	= 0.35	

Scale 1:1

Dimensions in « mm »
Dimensions and tolerances for Proof Barrels:
See Appendix CR 4.

Notes : 1) Check for safety reasons