



<b>C.I.P.</b>	<b>Cal. 8 mm C.F.</b>	<b>TAB.</b>	<b>VII</b>
		<b>Date</b>	<b>89-01-19</b>
		<b>Revision</b>	<b>06-09-19</b>

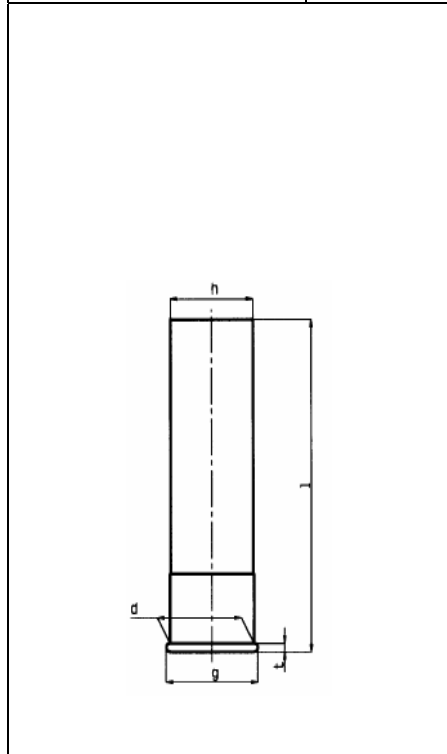

**CARTRIDGE MAXIMALE**

Dimens. Value Toler.

- $d^{1)}$  = 9.80 - 0.10
- $g$  = 12.20 - 0.30
- $t^{1)}$  = 1.45 - 0.20
- $h$  = 9.00 - 0.20
- $l$  = 44.30 - 0.70

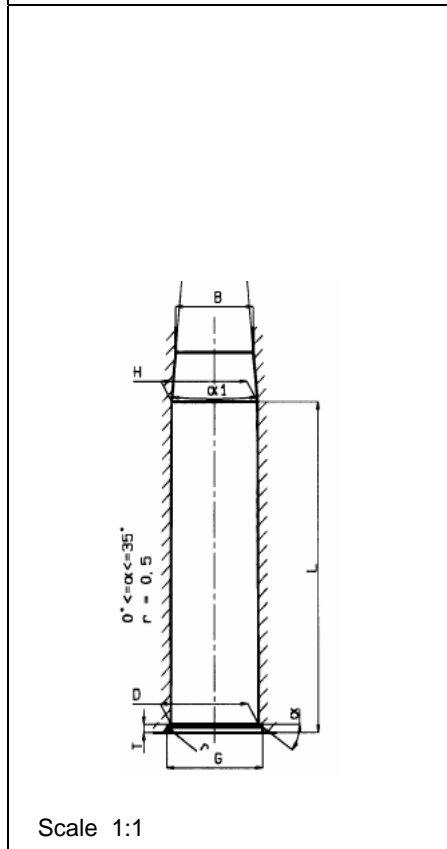

**CHAMBER MINIMALE**

Dimens. Value Toler.

- $D^{1)}$  = 9.85 + 0.10
- $G$  = 12.30 + 0.20
- $T^{1)}$  = 1.45 + 0.10
- $H^{1)}$  = 9.05 + 0.10
- $B^{1)}$  = 7.90 + 0.50
- $\alpha^{1)}$  = 10°30' max
- $L^{1)}$  = 44.50 + 2.00

Pressure transducer			
Pmax	PK	PE	M
	bar		
830	950	1040	12.5

Headspace

- $Fe$  = 0.10
- $Fe^{1)}$  = 0.20
- $Fe^{1)}$  = 0.35

Proof Barrel  
with bascule  
automatic

Scale 1:1

Dimensions in « mm »  
Dimensions and tolerances for Proof Barrels  
See Appendix CR 4.

Notes : 1) Check for safety reasons