



<b>C.I.P.</b>	<b>Cal. 9 mm C.F.</b>	<b>TAB.</b>	<b>VII</b>
		<b>Date</b>	<b>89-01-19</b>
		<b>Revision</b>	<b>06-09-19</b>

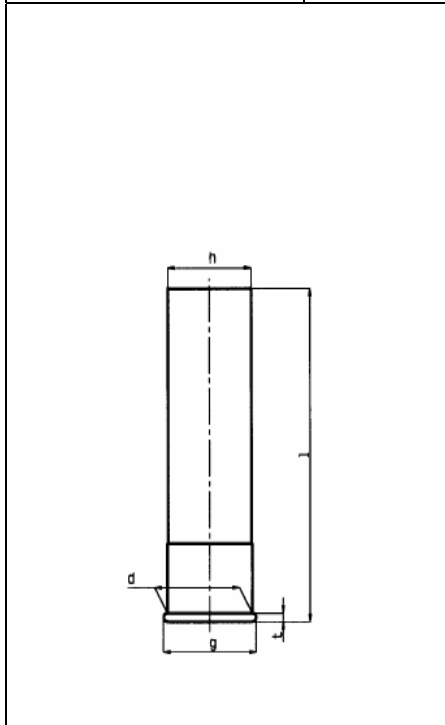

**CARTRIDGE MAXIMALE**

Dimens. Value Toler.

- d<sup>1)</sup> = 9.85 - 0.10
- g = 11.40 - 0.30
- t<sup>1)</sup> = 1.40 - 0.25
- h = 9.65 - 0.35
- l = 44.50 - 2.50

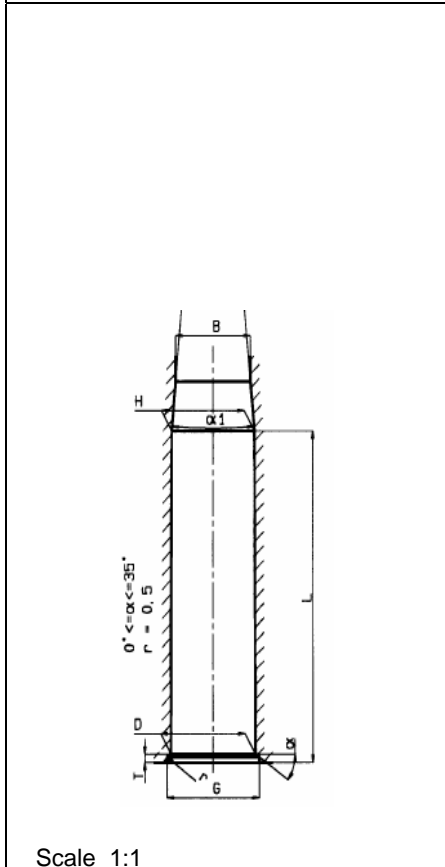

**CHAMBER MINIMALE**

Dimens. Value Toler.

- D<sup>1)</sup> = 9.90 + 0.10
- G = 11.50 + 0.10
- T<sup>1)</sup> = 1.45 + 0.10
- H<sup>1)</sup> = 9.70 + 0.10
- B<sup>1)</sup> = 8.50 + 0.50
- α<sup>1)</sup> = 10°30' max
- L<sup>1)</sup> = 44.60 + 2.00

Pressure transducer			
Pmax	PK	PE	M
	bar		
830	950	1040	12.5

Headspace

- Fe = 0.10
- Fe<sup>1)</sup> = 0.20
- Fe<sup>1)</sup> = 0.35

Proof Barrel  
with bascule  
automatic

Scale 1:1

Dimensions in « mm »  
Dimensions and tolerances for Proof Barrels:  
See Appendix CR 4.

Notes : 1) Check for safety reasons